Itme	Name	Spec.(L*W*T)	Qty
1	Top plane	1196*596*18	1
2	Base plate	1196*596*25	1
3	Decorative plate A	225*180*15	2
4	Decorative plate B	556*225*15	1
5	Side plate	556*225*15	2
6	Backplane	600*220*15	1
7	Drawer surface	600*220*15	1
8	Drawer side	285*118*15	2
9	Drawer end	543*118*15	1
10	Drawer bottom	523*295*5	1
11	Handle	80*17*20	1
12	Leg	76*50*140	4
13	Middle Support leg	40*40*130	1
14	Glass top	1200*600*5	1

Hardware List

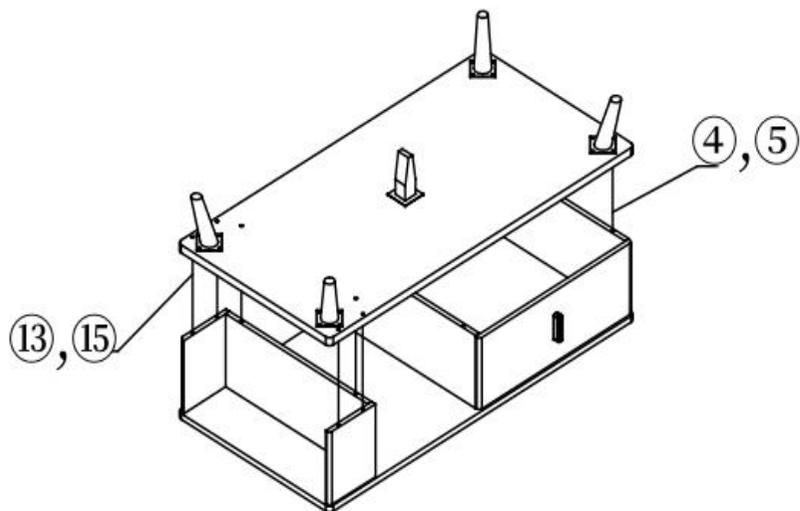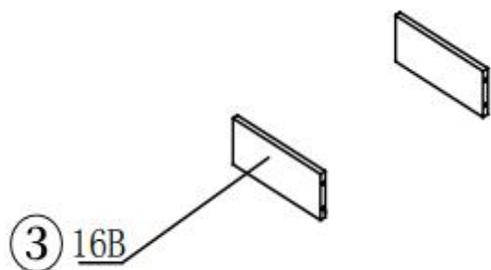| No.	Name	Picture	Qty.	No.	Name	Picture	Qty.	No.	Name	Picture	Qty.
①	Small tapping buckle bar Φ12		22	⑦	Galvanized plate		1	⑬	M6*30 cross screw		2
②	Small buckle wheel Φ12		22	⑧	M4*16 cross countersunk head tapping screw		1	⑭	M6*40 cross screw		
③	M3.5*14 cross countersunk head tapping screw		14	⑨	Furniture glide		12	⑮	Dia. 6mm flat washer		2
④	Large tapping buckle bar Φ15		14	⑩	Adjusting pin		12	⑯	three-section rail		1
⑤	Large buckle wheel Φ15		8	⑪	Comes with cushion handle screw		2				
⑥	Transparent rubber pad Φ15		4	⑫	Wood tip		2				
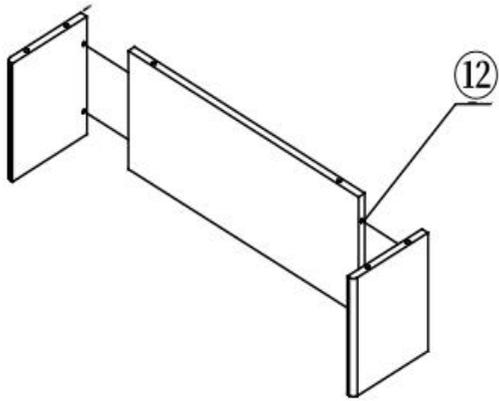
1、
Use ⑫ connect the 3 and 4.

2、
a. Use ⑬ and ⑮ to connect the 3 and 4 with the 1.
b. Use ⑤ and ④ to connect the 5 with the 1;
c. Use ③ to fix slide ⑯-A to the 5.

3、
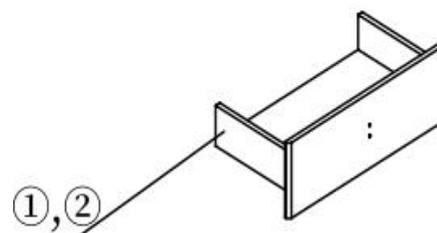Use ④ and ⑤ to connect the 6 to the 5.
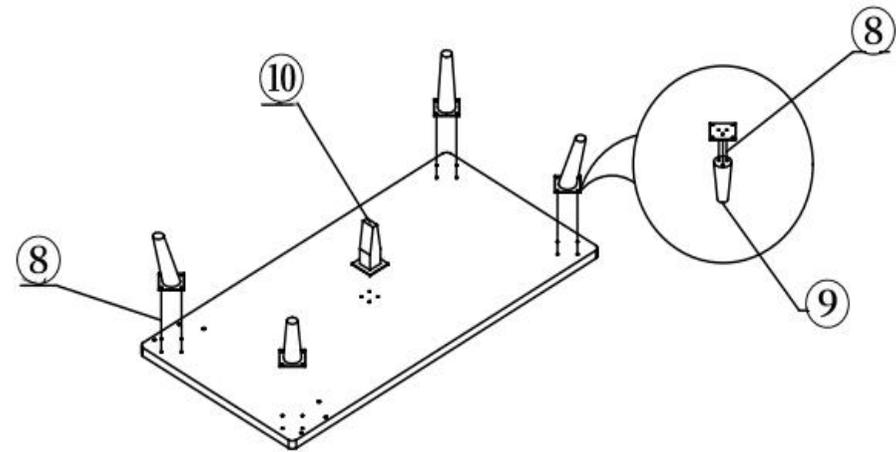
4、
a. The ⑦ adopts ⑧ to connect to the 12 and 13;
b. Use ⑨ and ⑩ to fix on the end of the 12 and 13 respectively;
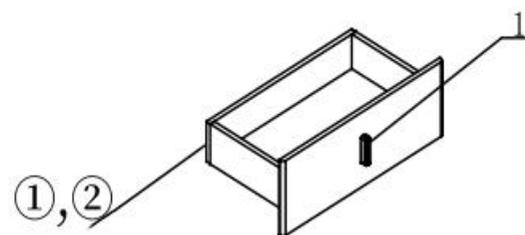c. Connect the 12 and 13 to the 2 using ⑧.

④,⑤

⑬,⑮

1,2

7、 The 8 adopts ② and ① to connect and fixed the7,then insert the 10.

11

1,2

8、 a. The 9 adopts ② and ① to connect and fixed the8.
b. Install the 11 with the ⑪ on the 7.

5、
a. Use ⑬ and ⑮ to connect the 3 and 4 with the 2.
b. Use ⑤ and ④ to connect the 5 with the 2.

⑥

③ 16B

6、
Use ③ to install slide ⑯-B on the outside of the 8.
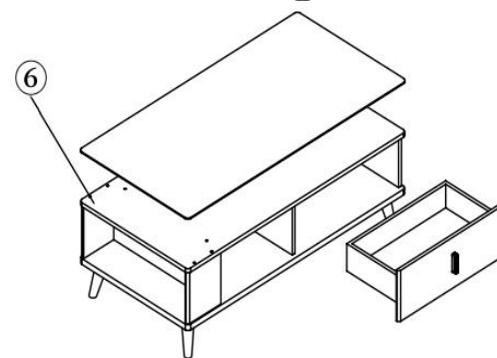
9、 a. Paste ⑥ evenly on the 1 first, and then place the 14 to adjust the spacing between the left and right front and back; b. Insert the drawer, adjust the spacing between the drawer surfaces.Installation complete