



Installation and User Manual

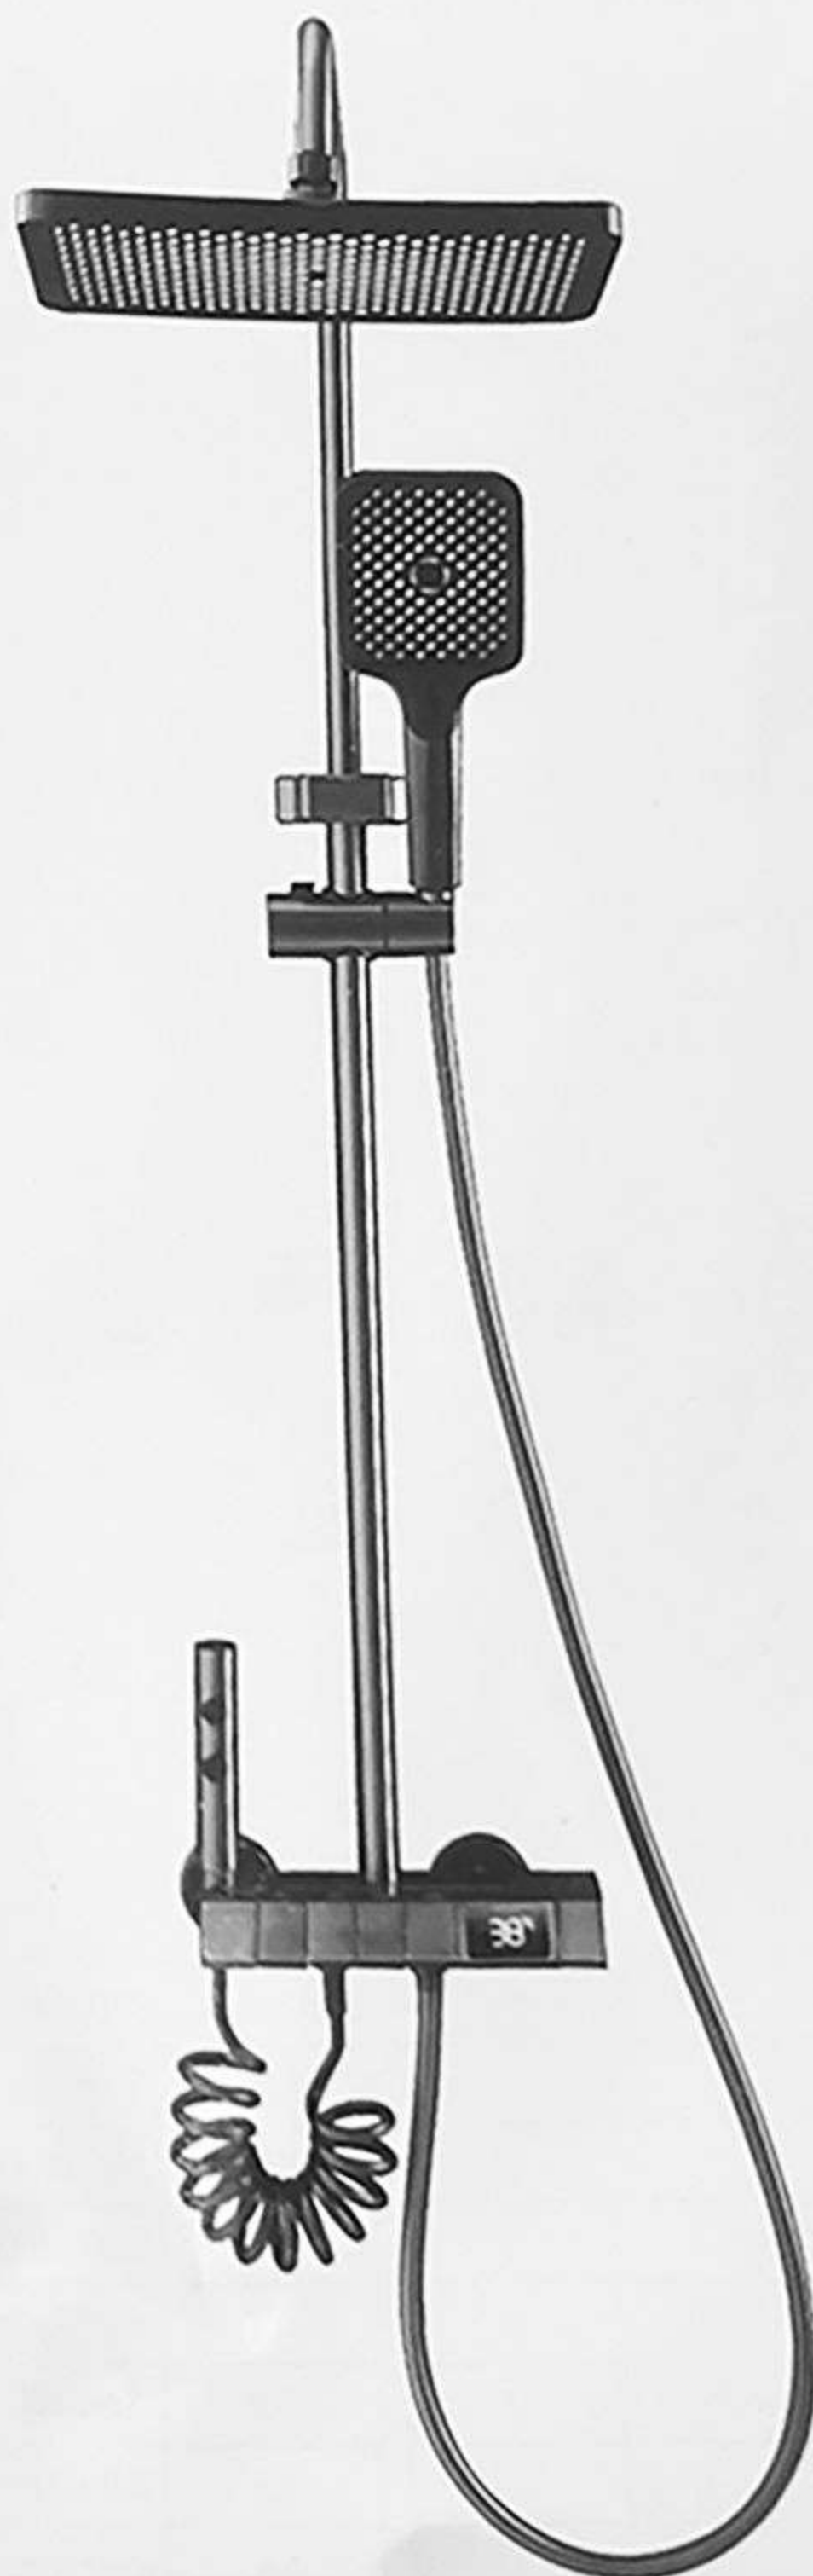

Installation and User Manual

Please refer to the "Standard Accessories List" after opening the product. The listed accessories. Check if the spare parts are complete, and if there are any defects, Please contact your local dealer immediately.


As shown in the following figure:

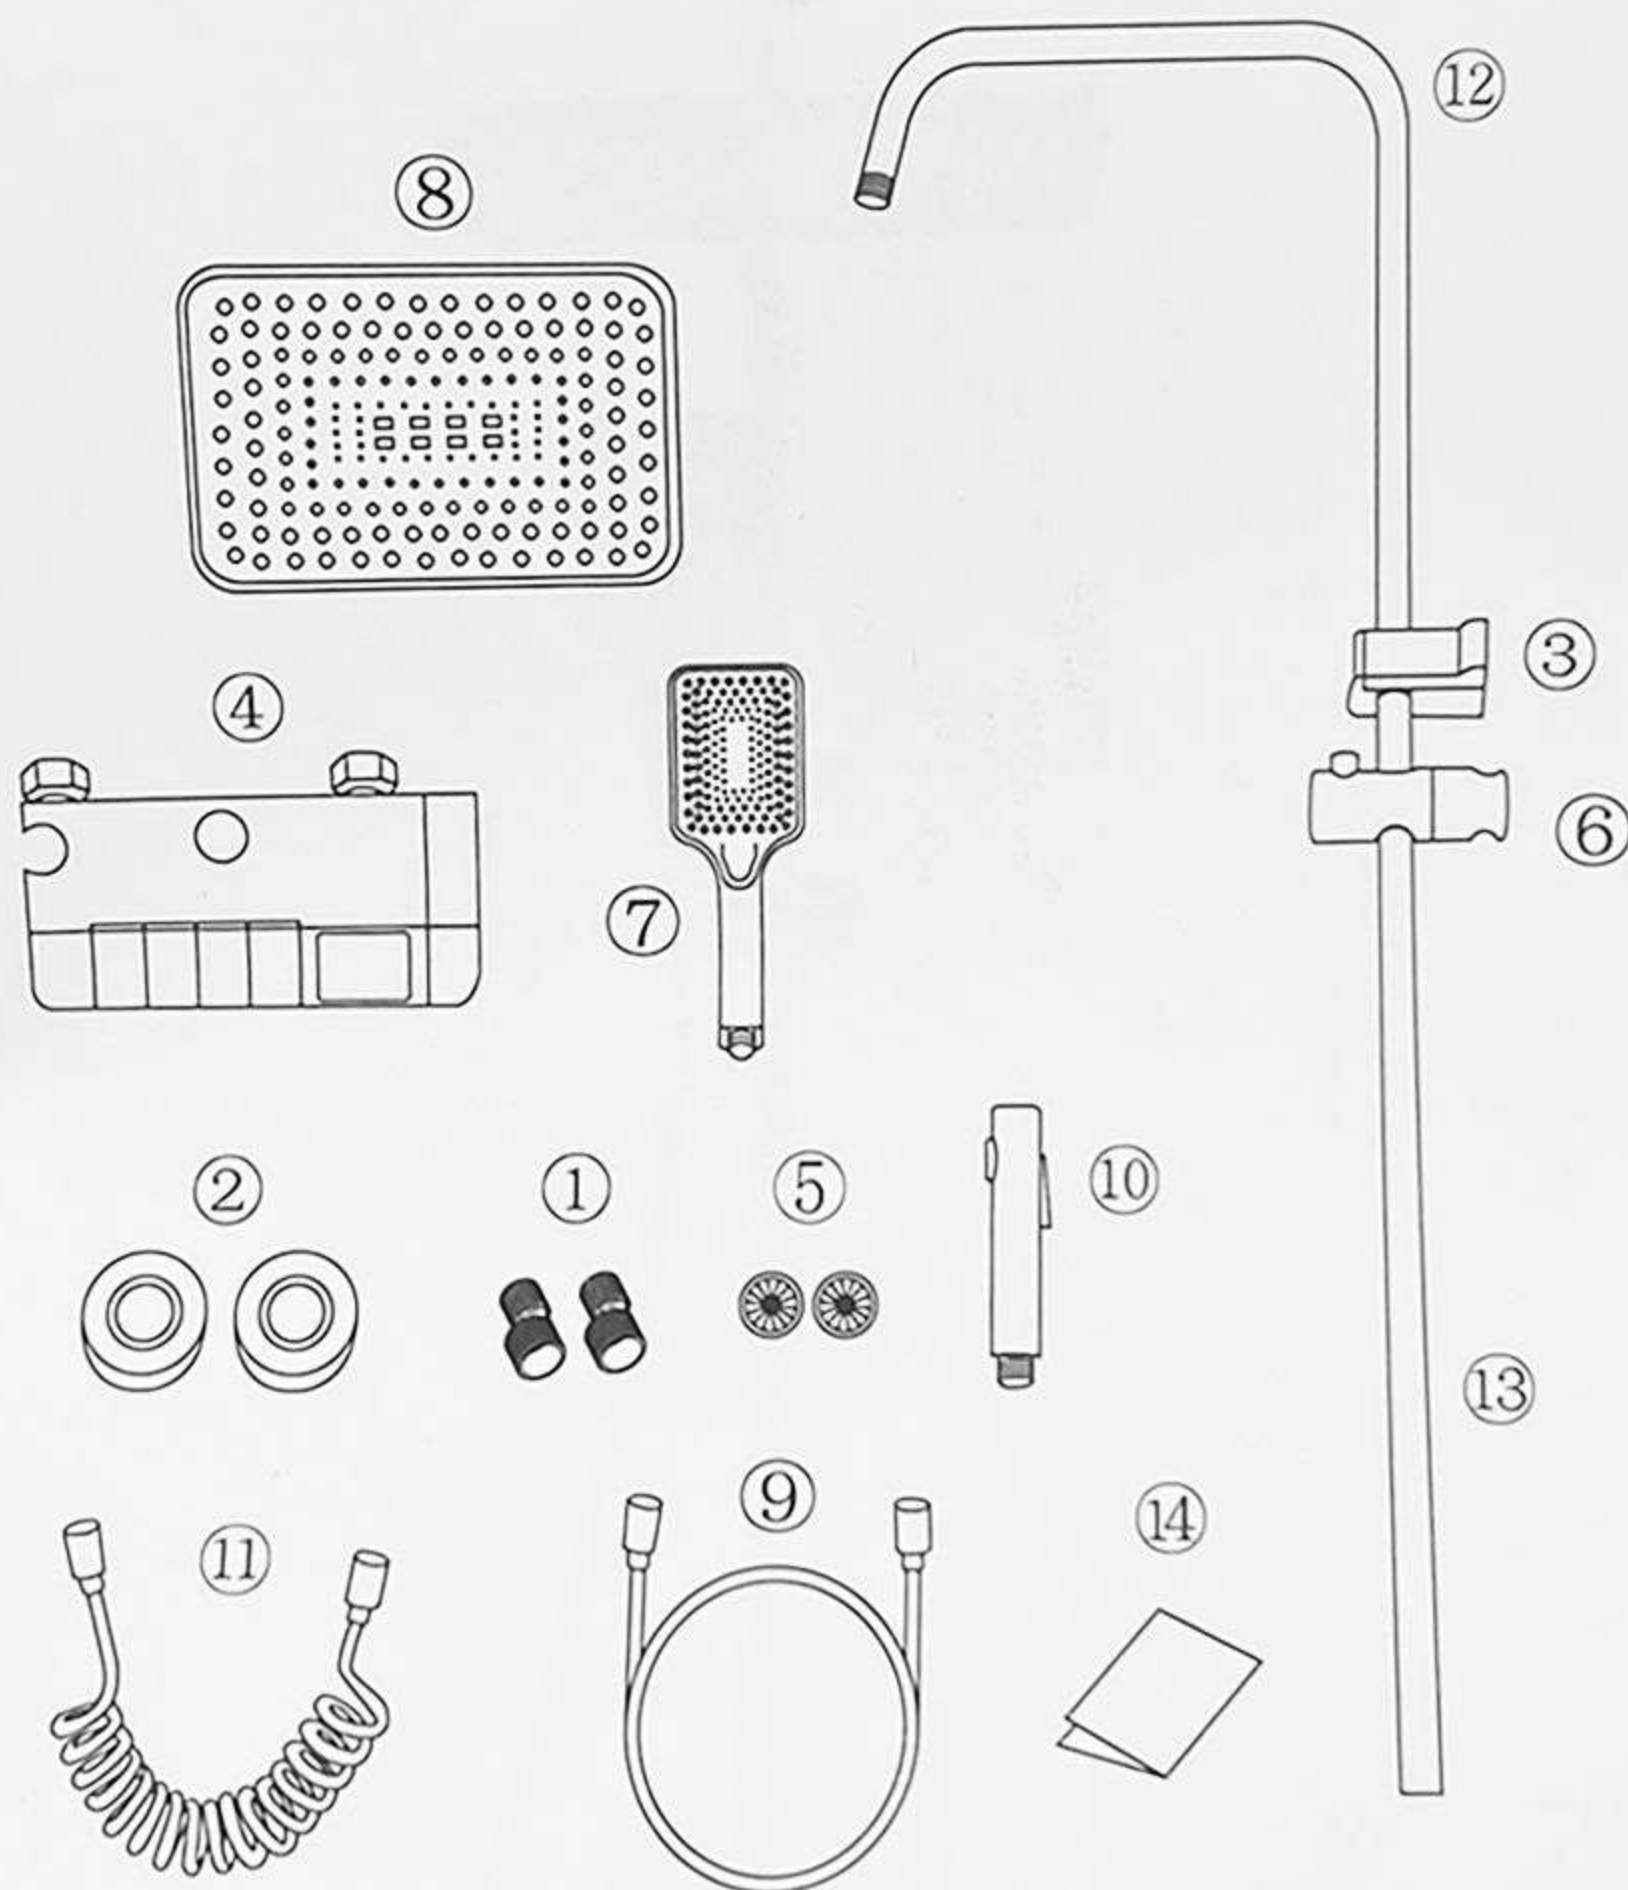


Number	Name	quantity
1	Bend angle	2
2	Decorative cover	2
3	Shower rod fixing seat	1
4	subject	1
5	Water stop filter screen	2
6	Hand spray seat	1
7	Hand spray	1

Number	Name	quantity
8	Top spray	1
9	Hand spray water pipe	1
10	Spray gun	1
11	Spray gun water pipe	1
12	Seven shaped shower rod	1
13	Straight rod shower rod	1
14	instructions	1


1. First, screw the corner onto the wall outlet pipe, align the two installation holes on the main panel, then rotate the decorative cover clockwise and screw it onto the corner, and finally install the water stop filter into the two corners. Note: "Align the spacing between the main panel and the corners. If alignment is not possible, it can be adjusted by wrapping the raw material tape a few more turns or a few less turns."

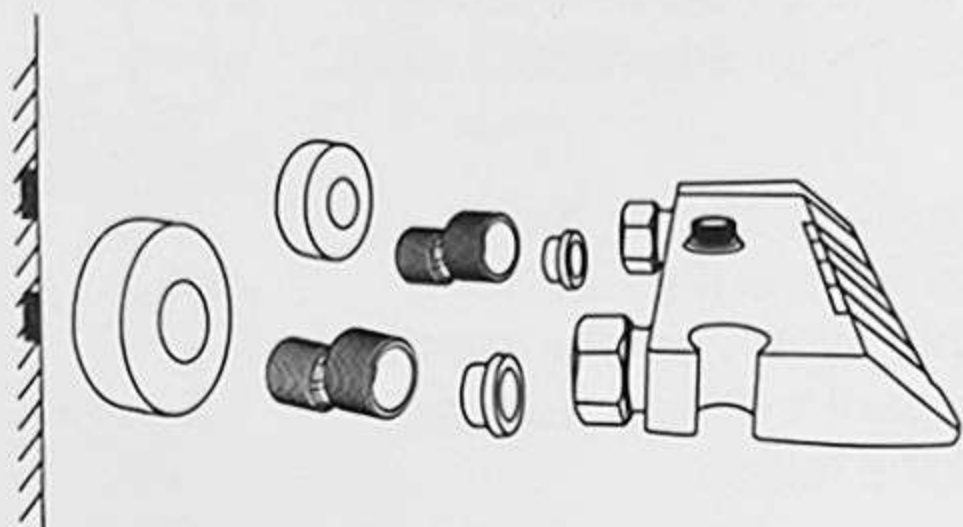


2. Rotate the straight shower rod counterclockwise and install it on the main panel.

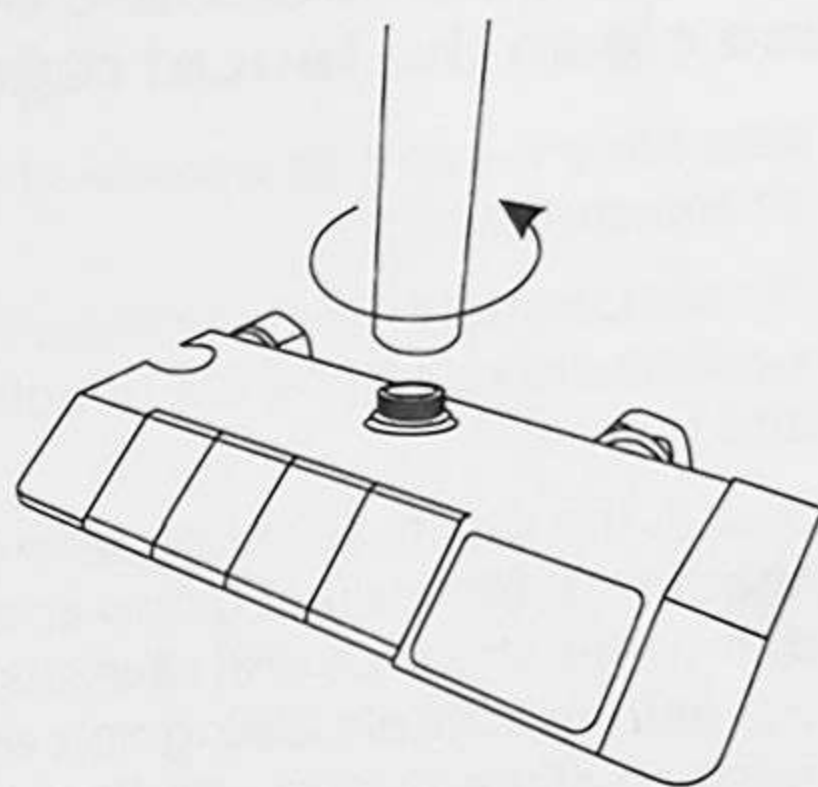


3. Disassemble the fixed seat of the shower rod. There are size differences and internal threads inside the fixed seat. The large circle part catches the straight rod, and the small circle part catches the seven shaped rod. [Note: Before installing the fixed seat, align it with the wall before drilling holes, mark it before drilling holes to avoid misalignment after drilling.]

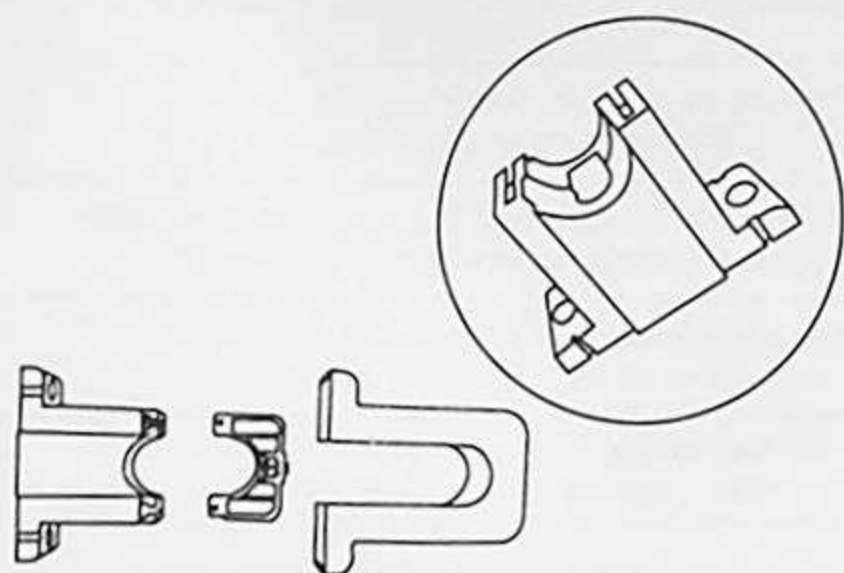


4. Insert the seven shaped rod directly into the straight rod and then use the fixing seat to clamp it in place.

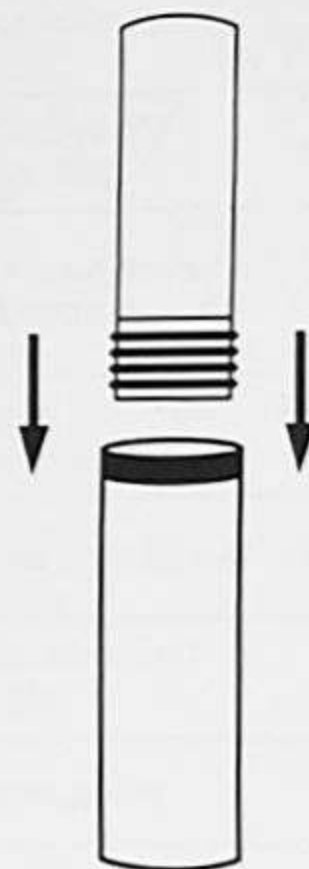

5. After installing the seven pole, screw on the top spray nozzle.

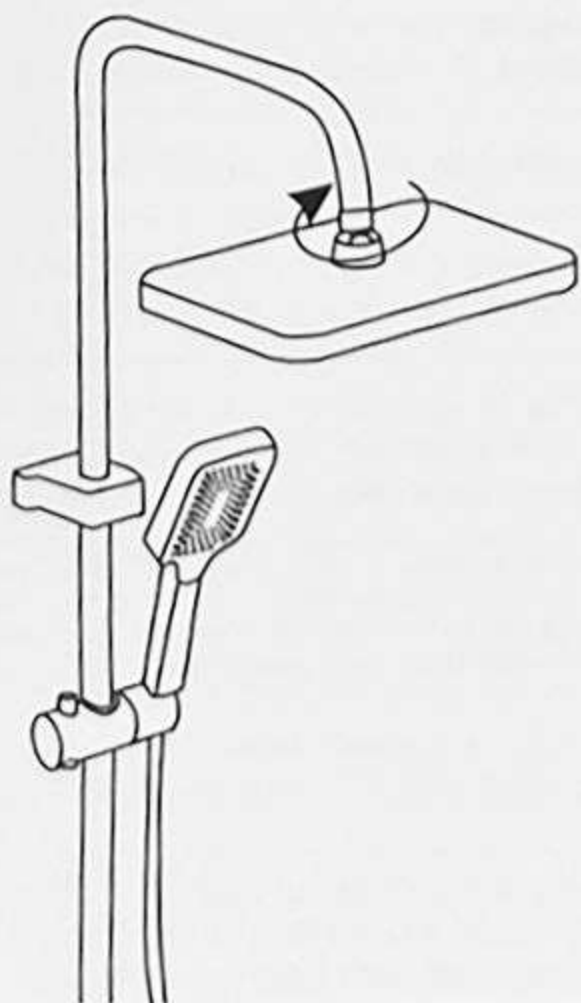


6. Connect the hoses of the hand spray and spray gun to the main panel, and finally install both the hand spray and spray gun.

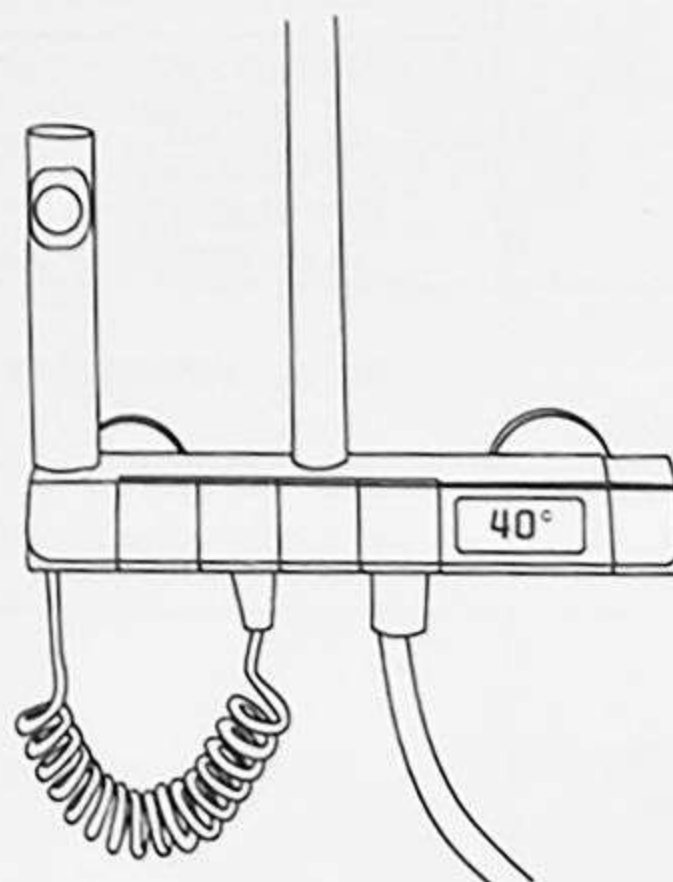


Maintenance and upkeep

To maintain a smooth and bright surface of the faucet, please clean the faucet regularly or regularly:

- ✓ Regularly clean with water and dry the faucet with a soft cotton cloth;
- ✗ Do not use detergents or nylon brushes containing coarse particles such as cleaning powder or polishing powder, To avoid product wear and tear;
- ✗ Due to the ability of acidic detergents to corrode coatings, they should not be used. If using acidity After washing the tiles with detergent, the tiles and utensils should be thoroughly washed with water immediately, Using non washing detergent to flow onto the surface of the faucet, eroding the coating of the faucet;
- ✗ When using the faucet, do not use force to pull the showerhead hose to prevent it from cracking.



Soft cotton fabric



Polishing powder
Decontamination powder



acidity



Common problems and solutions

Abnormal phenomenon	Frequently asked questions	Solution
No water output	The water pipe or inlet pipe is blocked	Check if the water pipe or inlet pipe is blocked and ensure that it is unobstructed
	The faucet switch is not turned on or the water outlet pipe is blocked	Check if the faucet switch is in an open state and if the outlet pipe is blocked, And make it unobstructed
	The inlet hole of the outlet valve core is blocked by mud or debris	Be sure to clean the debris and sediment inside the water pipe before installation
Small outflow	The effluent flow rate is too small	Check if the water pressure of the water source meets the requirements for the use of the faucet
	The water source switch is not fully turned on	Check if the water pressure of the water source meets the requirements for the use of the faucet
	The bubbler is blocked	Turn off the switch, disassemble the bubbler, and rinse thoroughly with clean water
Unstop or leaking water	Failure to follow the instructions for Installing and using the faucet And the installation parts are not locked in place	Be sure to install it in place according to the instructions provided by our company
	Insufficient or incorrect installation of joint nuts, O-rings or gaskets	After installation, be sure to check for missing or incorrect installation of O-rings and gaskets Accessories such as joints or nuts
	Cover, nut, connecting pipe, loose or slippery joint Teeth not locked tightly	Retasten the nuts, joints, covers, or replace the sliding teeth accessories
	The size of the O-ring and gasket is too large or too small	Install standard O-ring and gasket
	The product has been used for a long time, and the O-ring or gasket is damaged Wear or aging	Replace O-ring or gasket with the same specification and material
Improper assembly	Replace with non company parts	Check whether to use parts produced by our company, be sure to Replace with parts of the same model and specification produced by our company
	Using incorrect or incorrect repairs	If the faucet valve core or other specially made parts are disassembled, they will lose their effectiveness. Please do not disassemble or disassemble by yourself. Please read the product installation and usage manual carefully
Cleaning care	Using incorrect cleaning care	Clean with clean water, soft cloth, and mild liquid cleaning products Product surface
		Do not use any acidic cleaning agents or other corrosive substances Clean the surface of the product and its accessories with cleaning materials!