




上翻门吊柜



right side panel *1

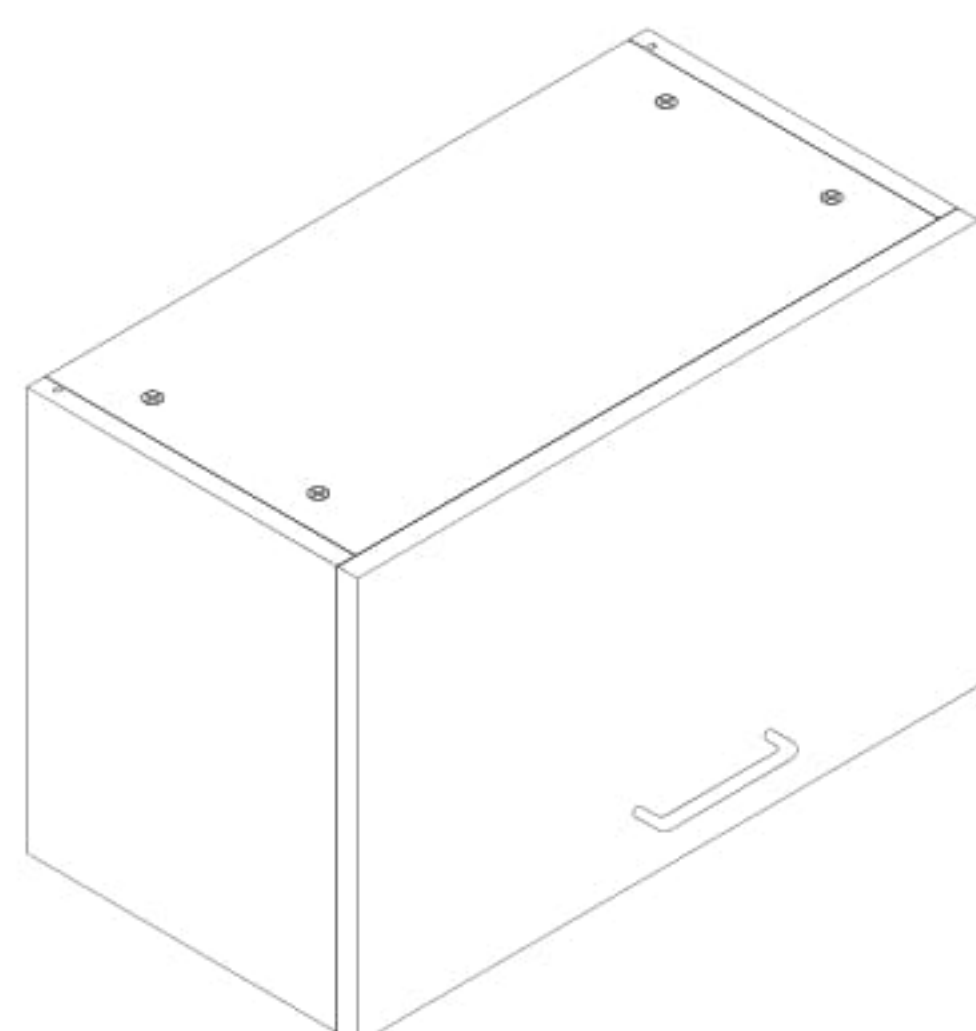


left side panel *1



Door panel *1



bottom panel *2

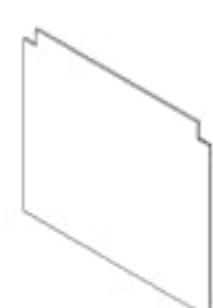

back panel *1



Dowel



Eccentric screw



Eccentric wheel



Expansion plug



Screw



Hanging bracket



Hinge



Handle




Fine thread screw




Shelf pin

①

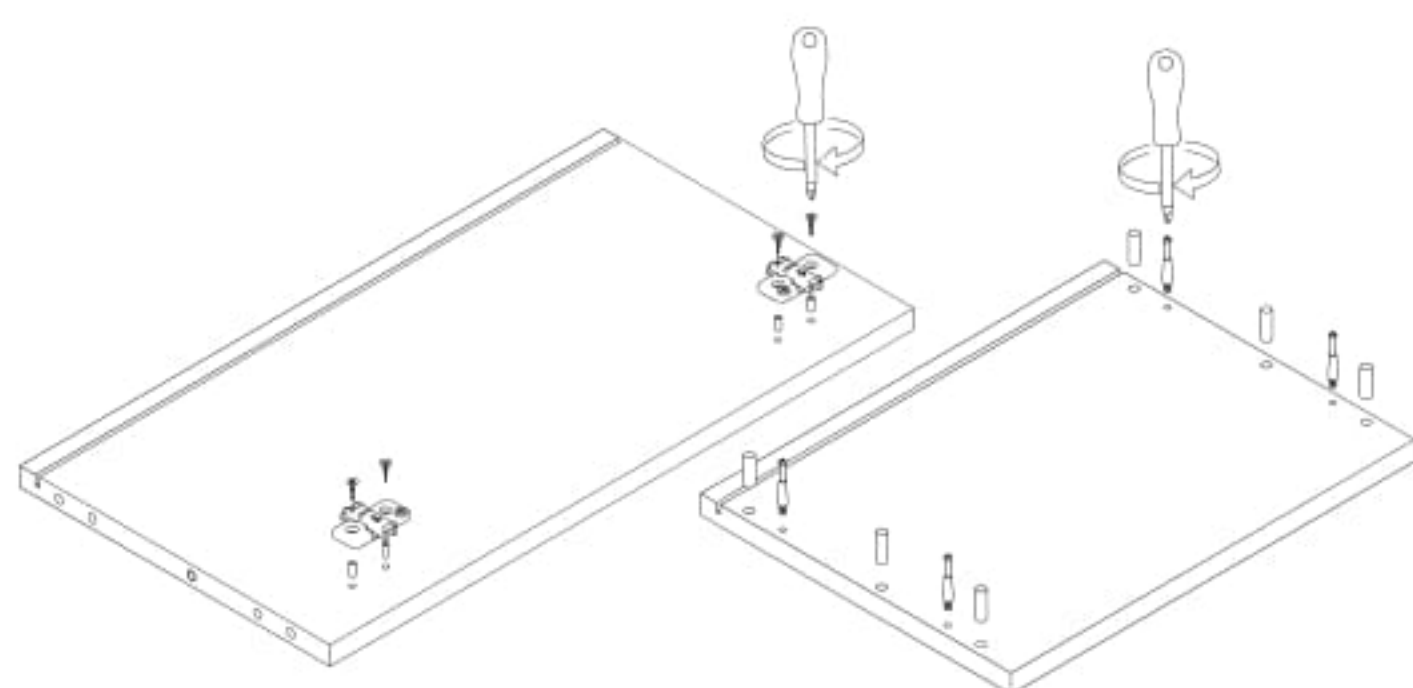


Install wood dowels and screws on the left and right side panels
Fixed wood tenon and screw,
fixed hinge base

②

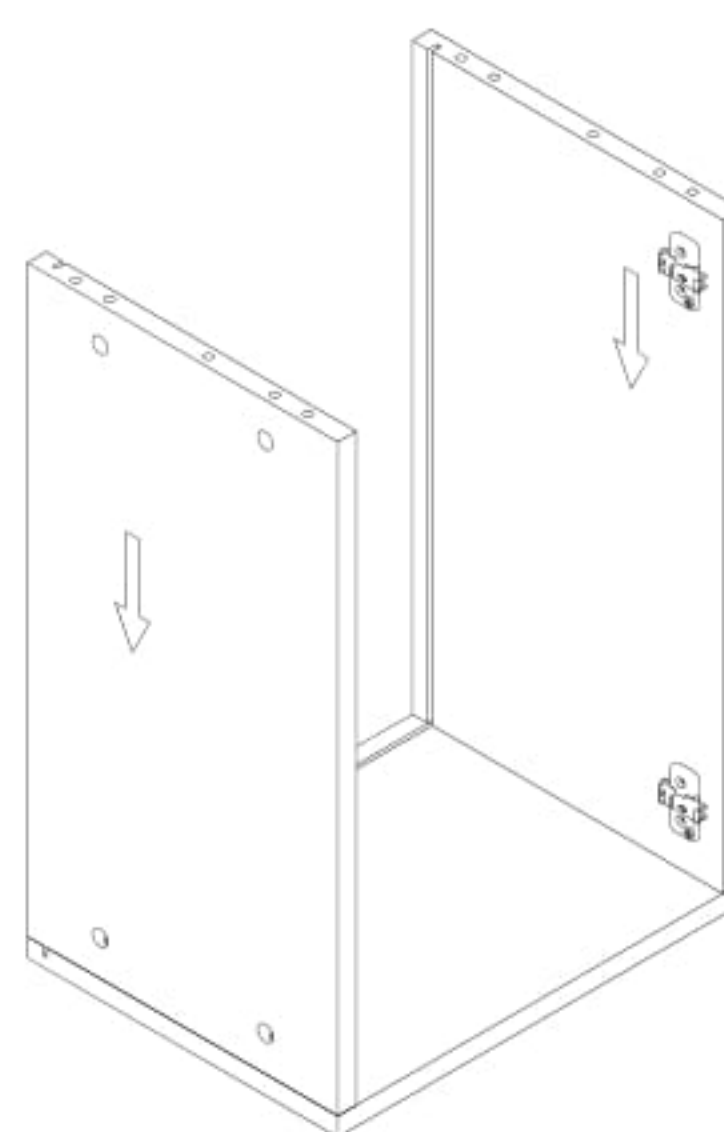


Place the bottom panel and Rear slats

③

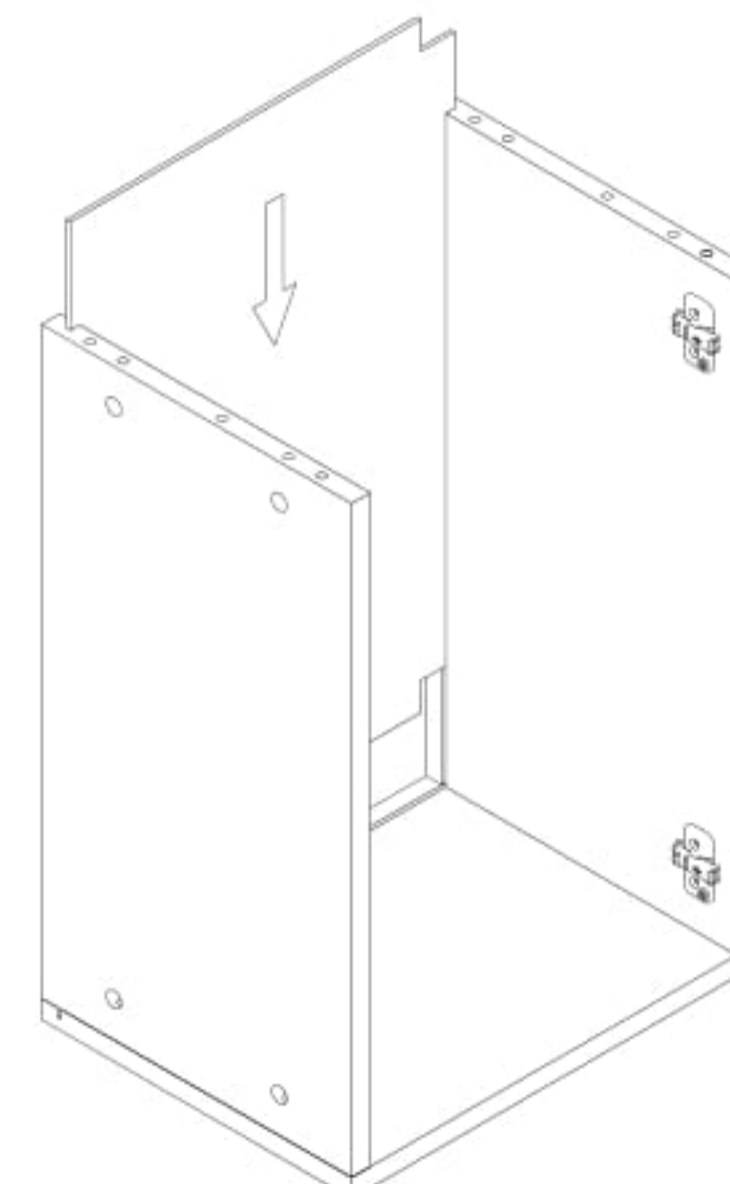


Place the back panel

④

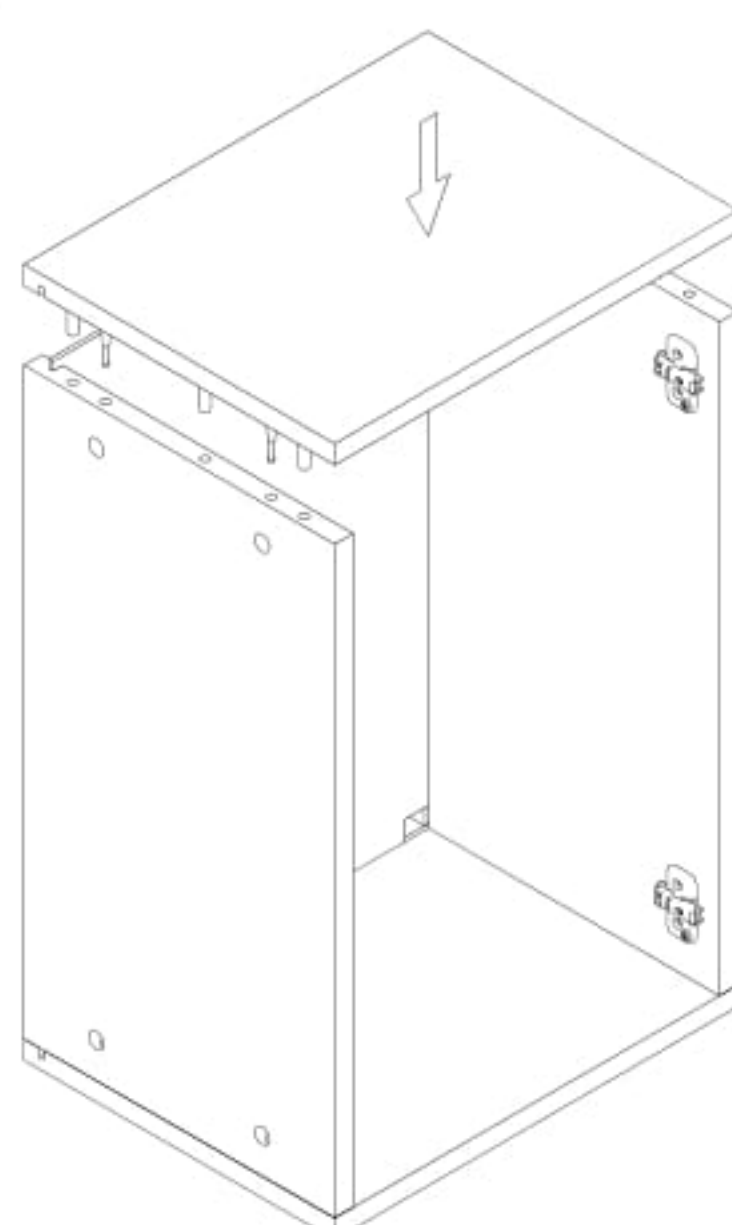


place the side panel

⑤

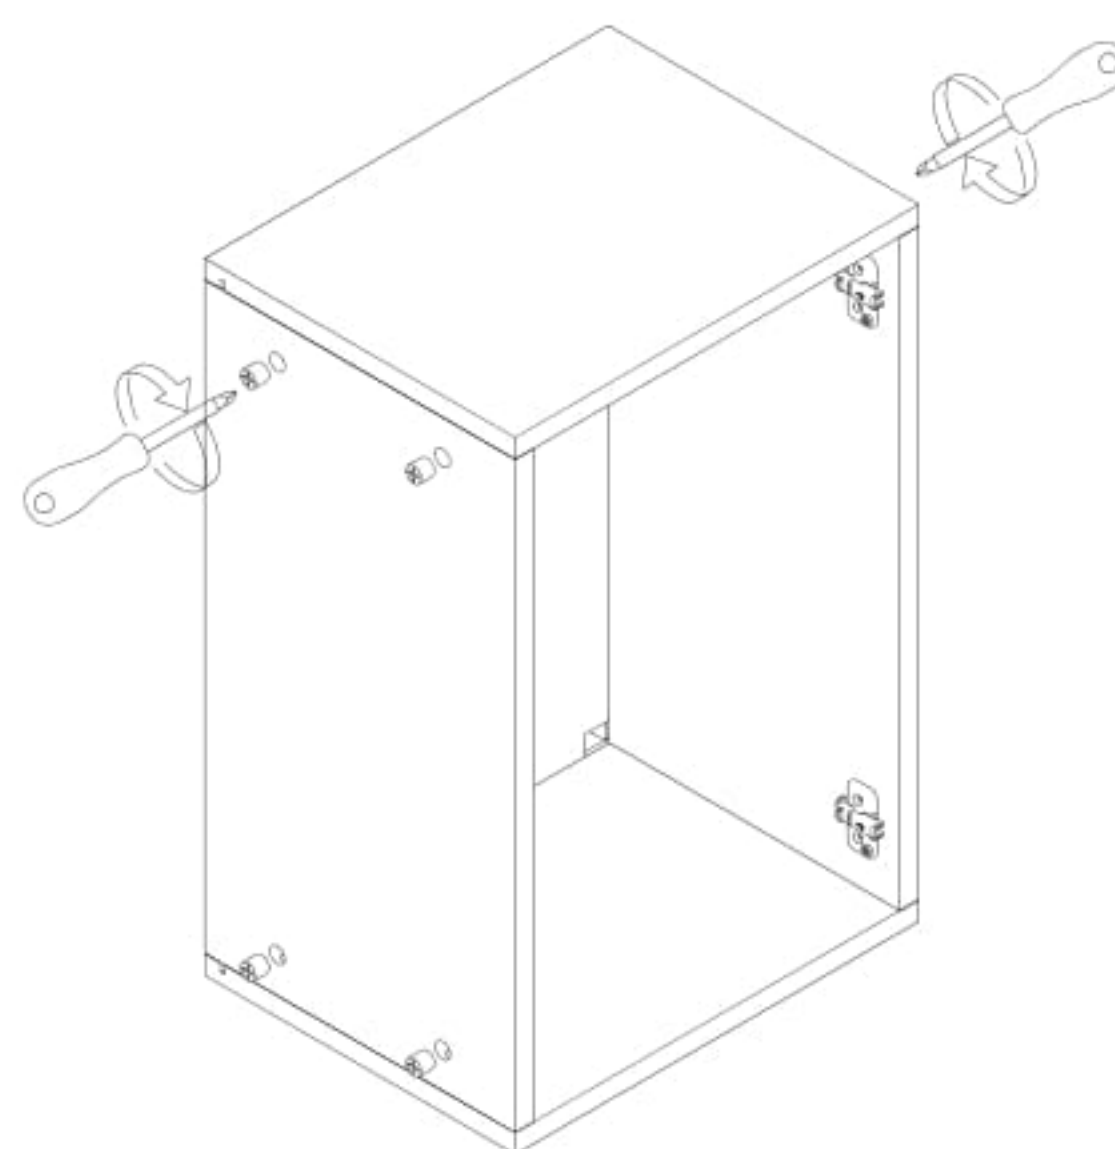


Place and fix the connection

⑥

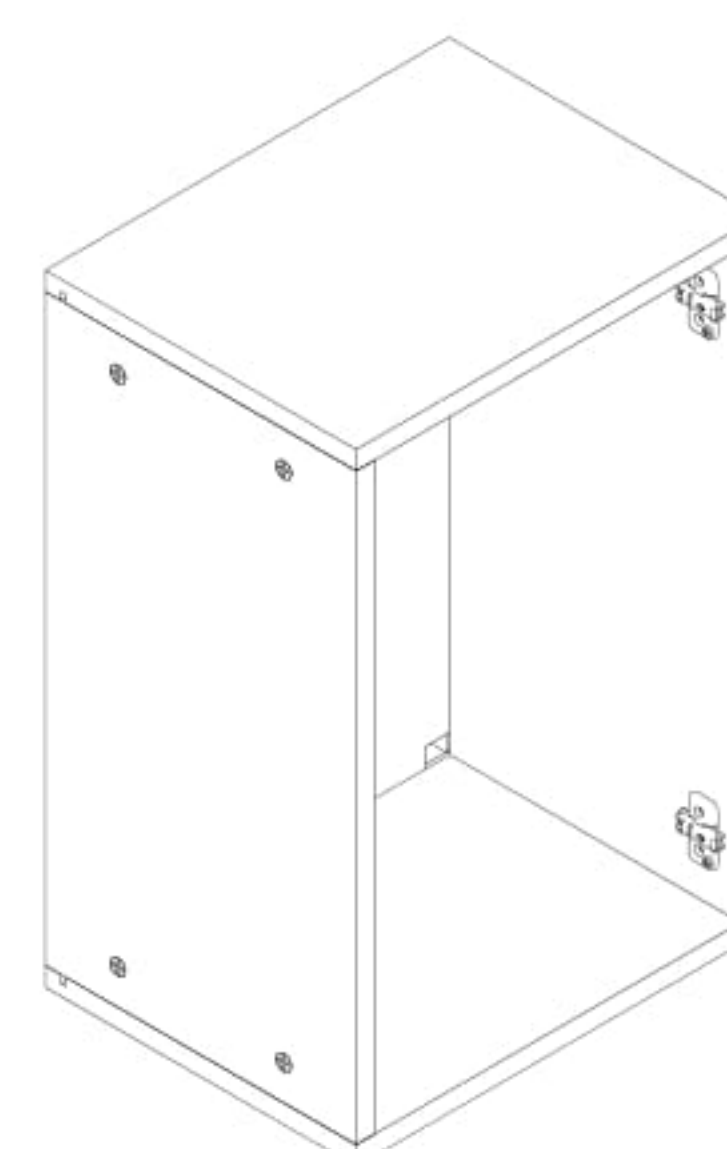


Finish the carcass assembly

⑦

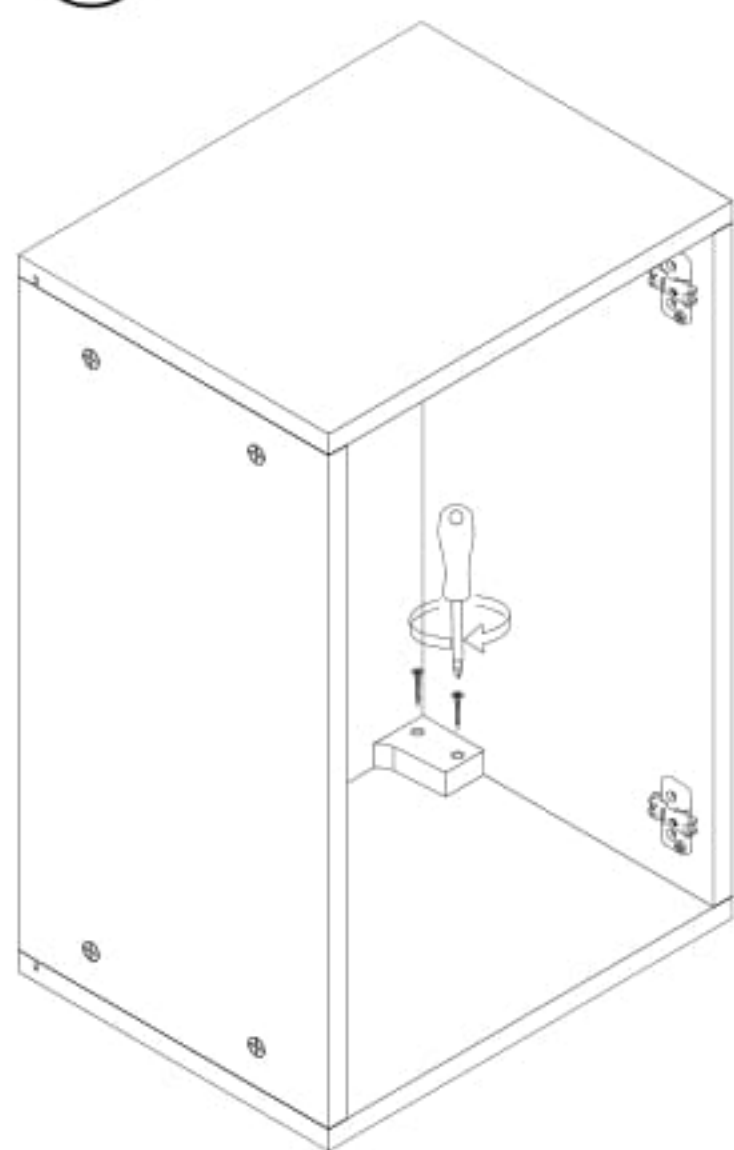


Install the hanging bracket,

⑧

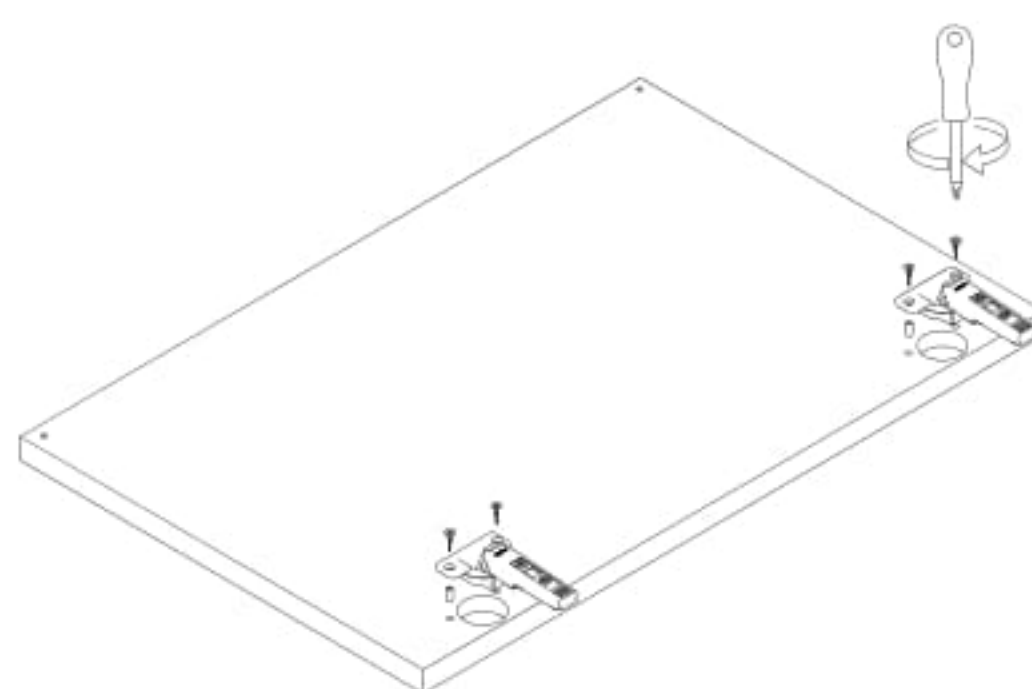


Place the Anti-collision particle

⑨

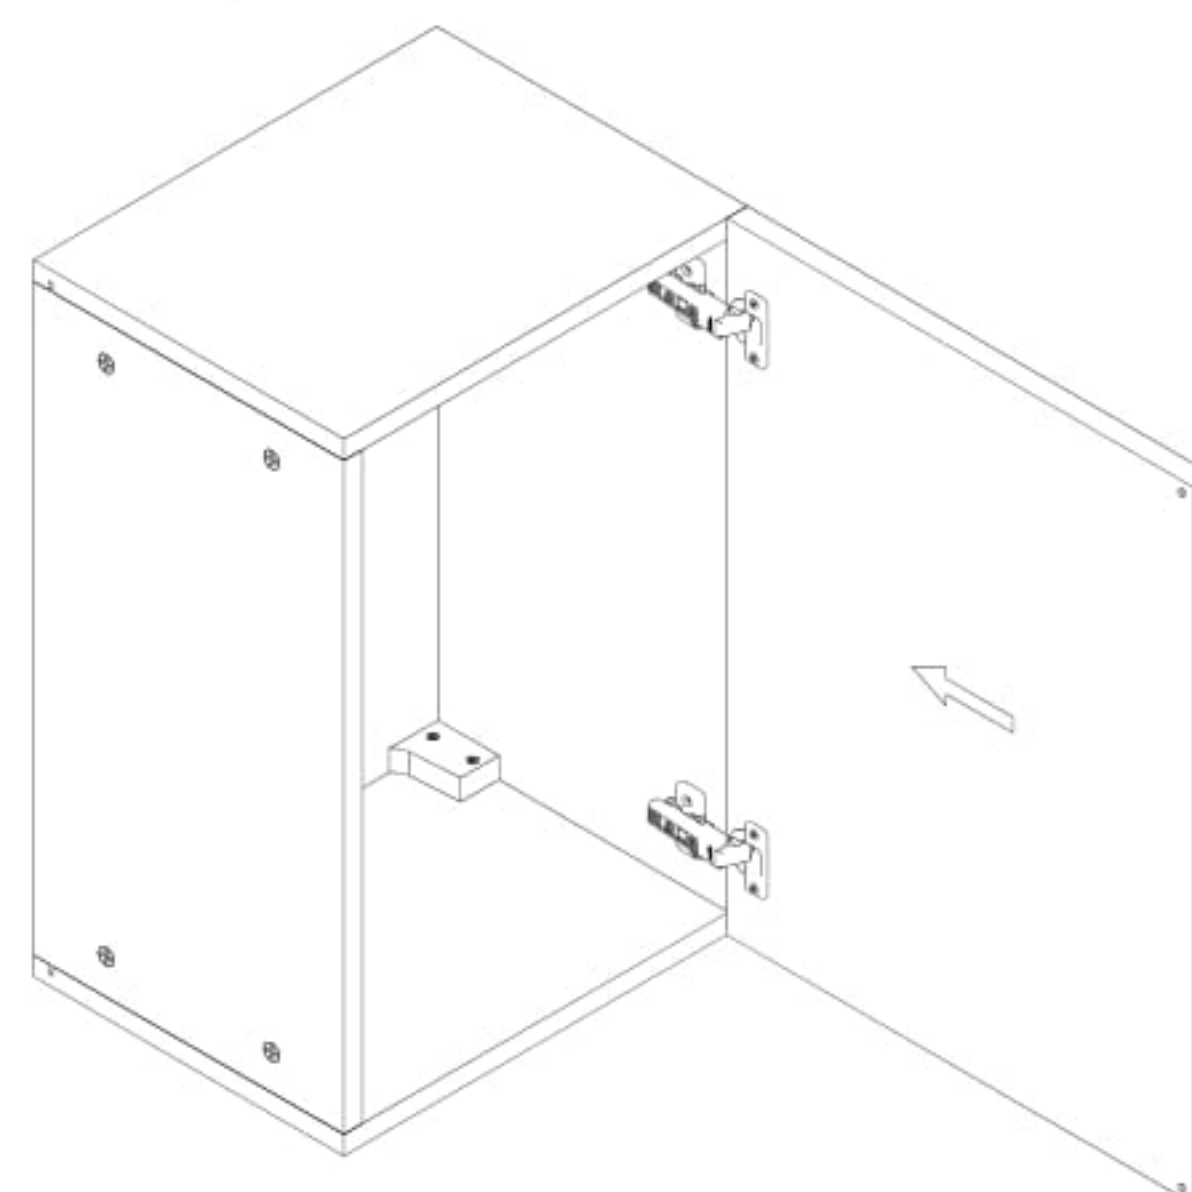


Install the door, fix the hinge into hinge base

⑩

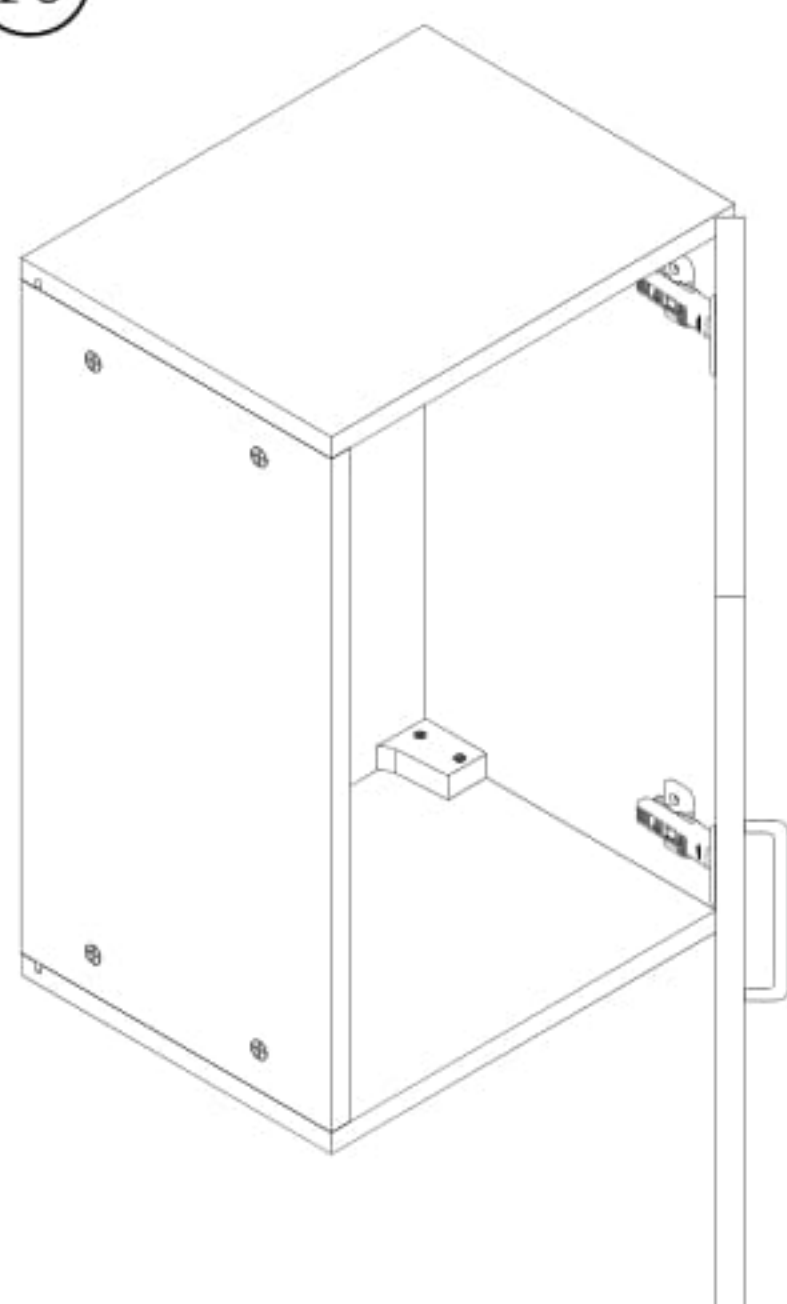


Fix the handle, End of the assembly

⑪

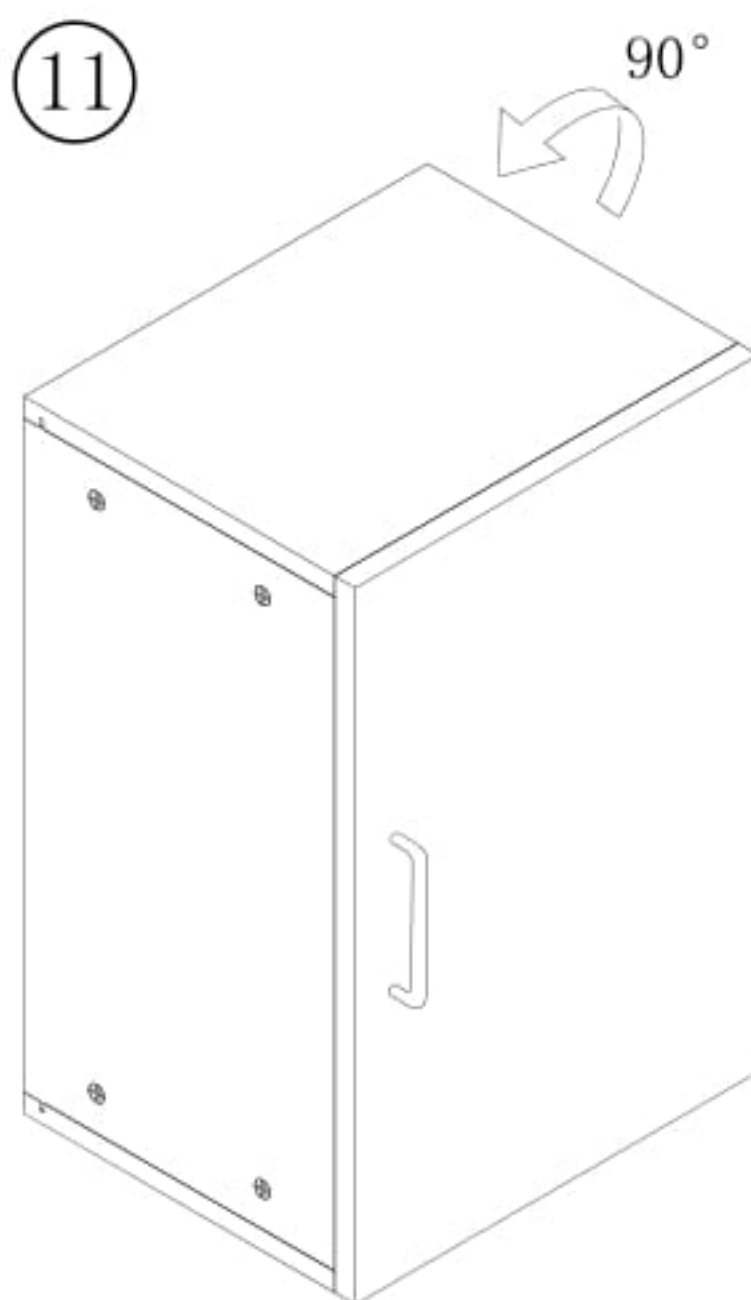

Turn over the cabinet by 90°

⑫

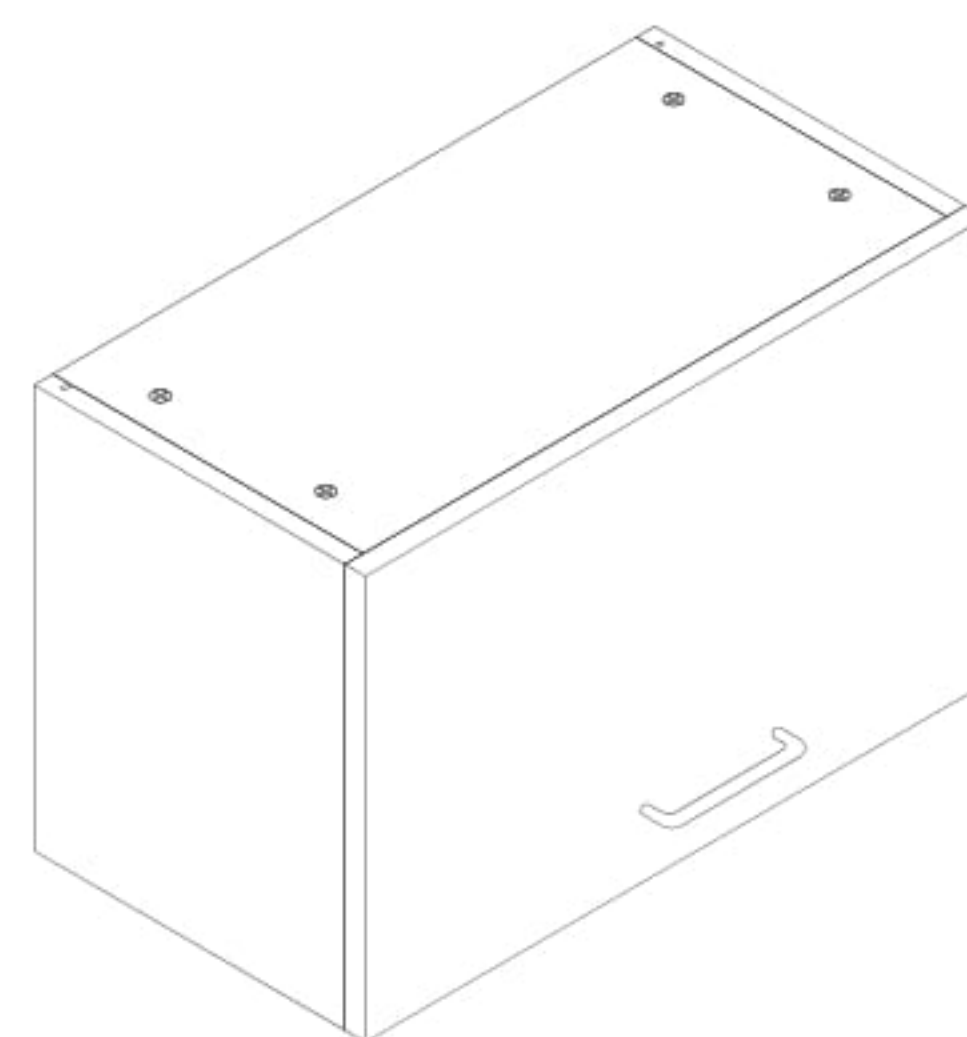

End of the assembly


Mount the cabinets to the wall by hanger process

Steps:

- 1、Confirm the hanger line on the wall (60mm below the top of the wall cabinet, 20mm within the side panel of the wall cabinet, match the drawing No.1)
- 2、drill the hole on the wall, place the wall expand plug with 5mm*40mm screw, install the wall hanger on the wall, one wall cabinet need 2 wall hanger. match the drawing No.2)
- 3、Hang the assembled wall cabinet on the wall hanger ,Please proceed with this step carefully.
- 4、adjust and tighten the screw of the wall cabinets' suspension fittings, like drawing No.3; make sure the carcass is flush with the wall.

Note:


- 1、Double the wall's situation such as electric wires and water pipes before drill the hanger hole. Use the Glass hole opener drill the hanger hole if need.
- 2、The drill line must be flush with the ground,
- 3、After the installation of a single wall cabinet, it can be fixed with glue to prevent shaking.

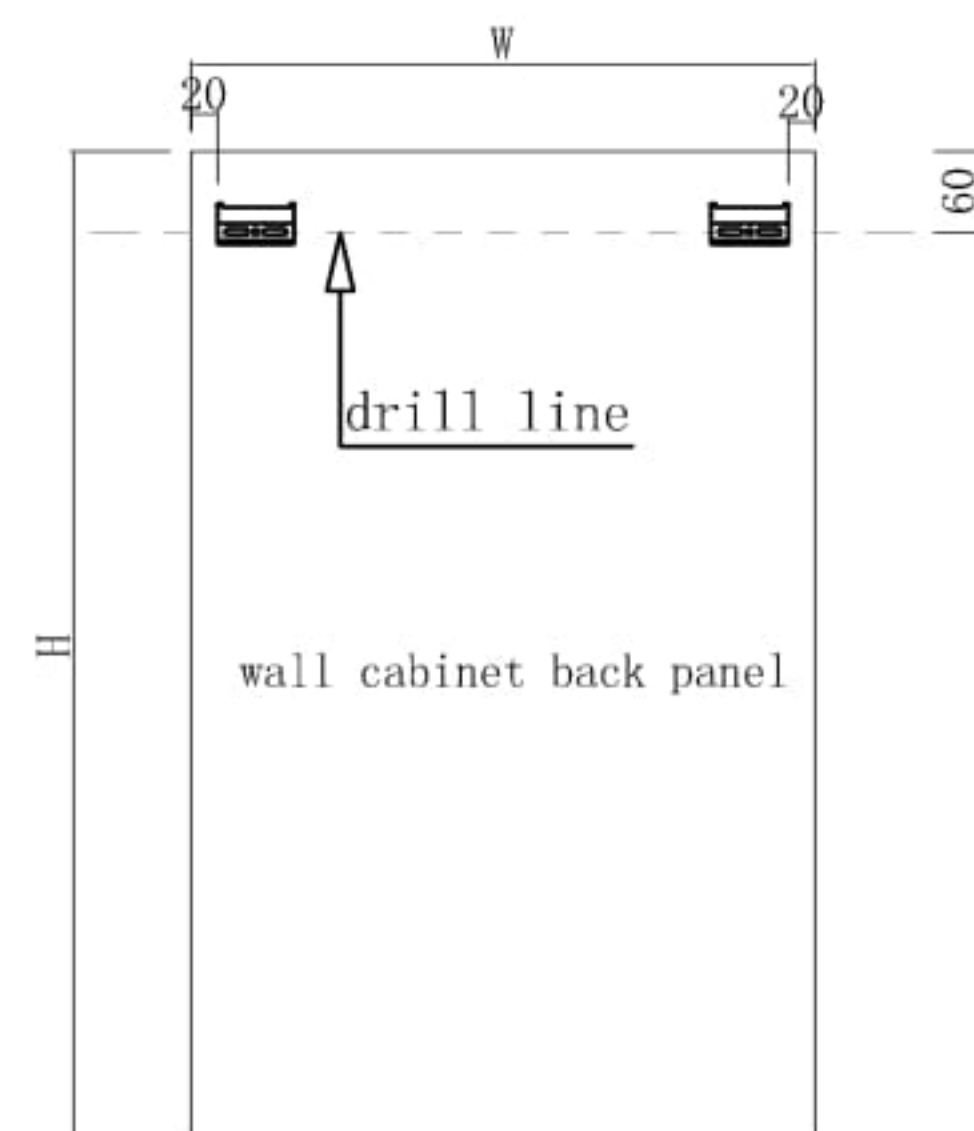

No, 1



No, 2

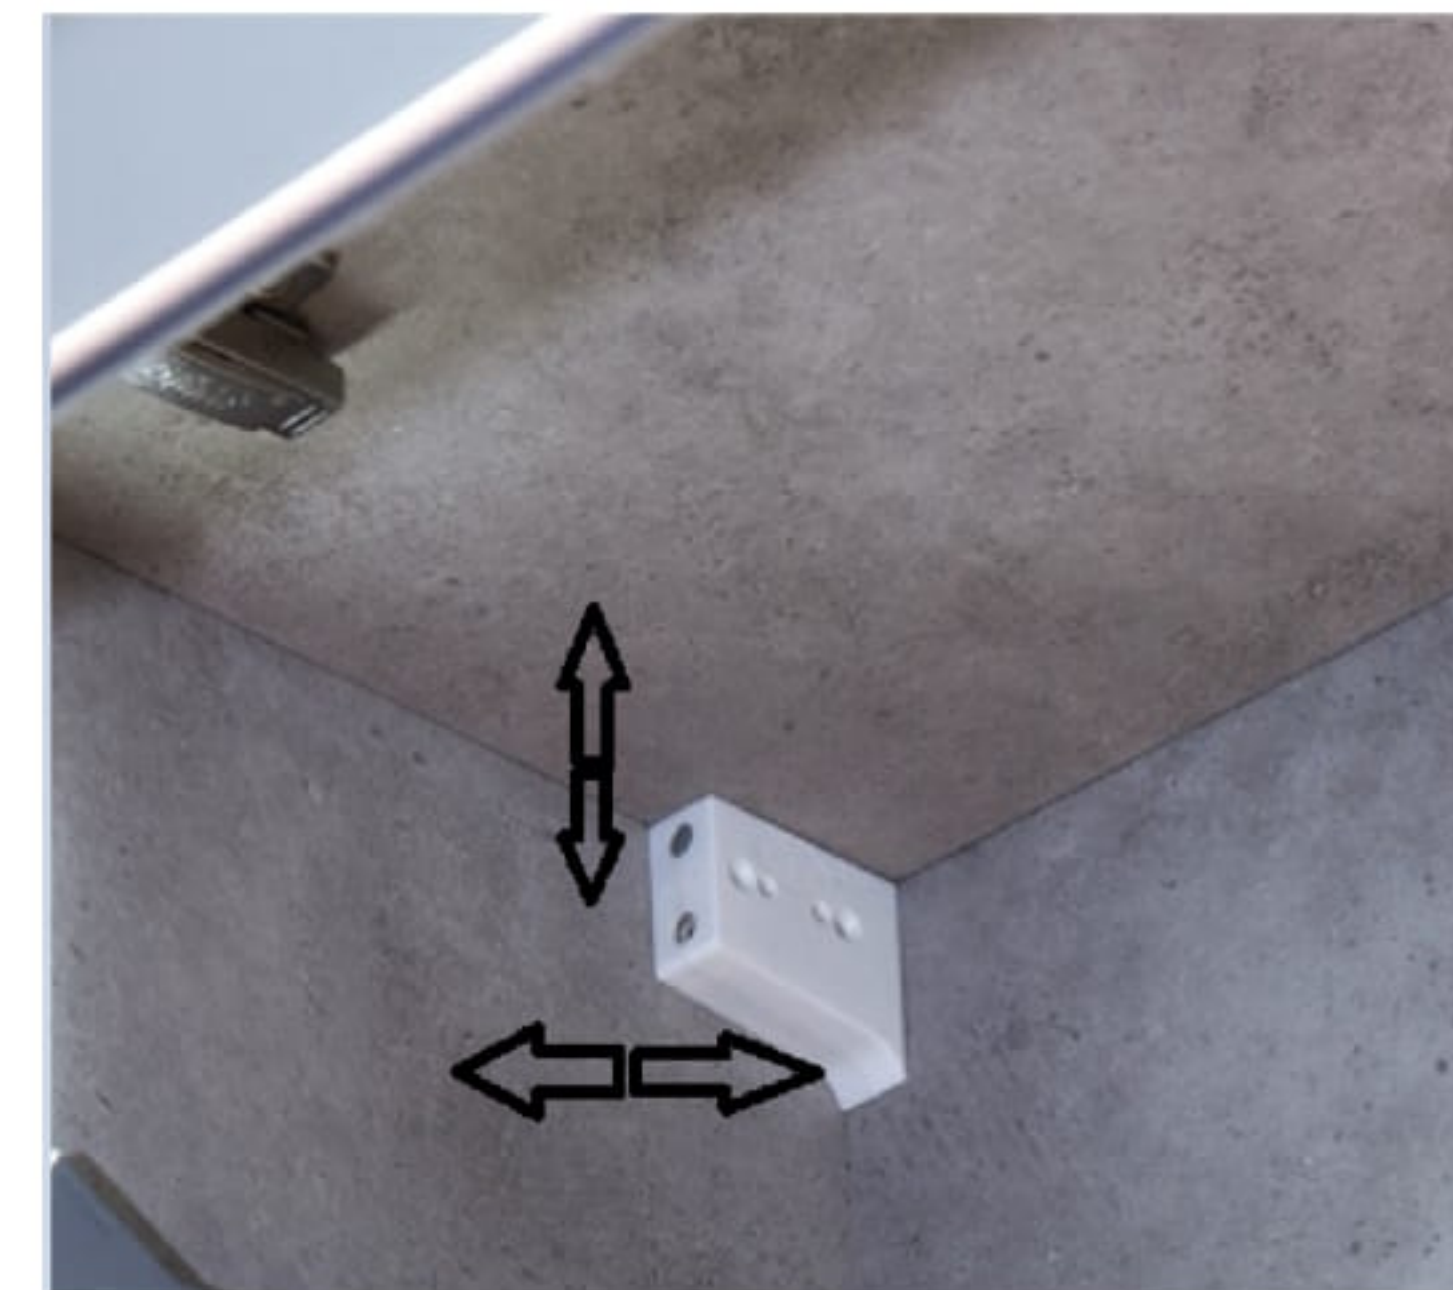

No, 3