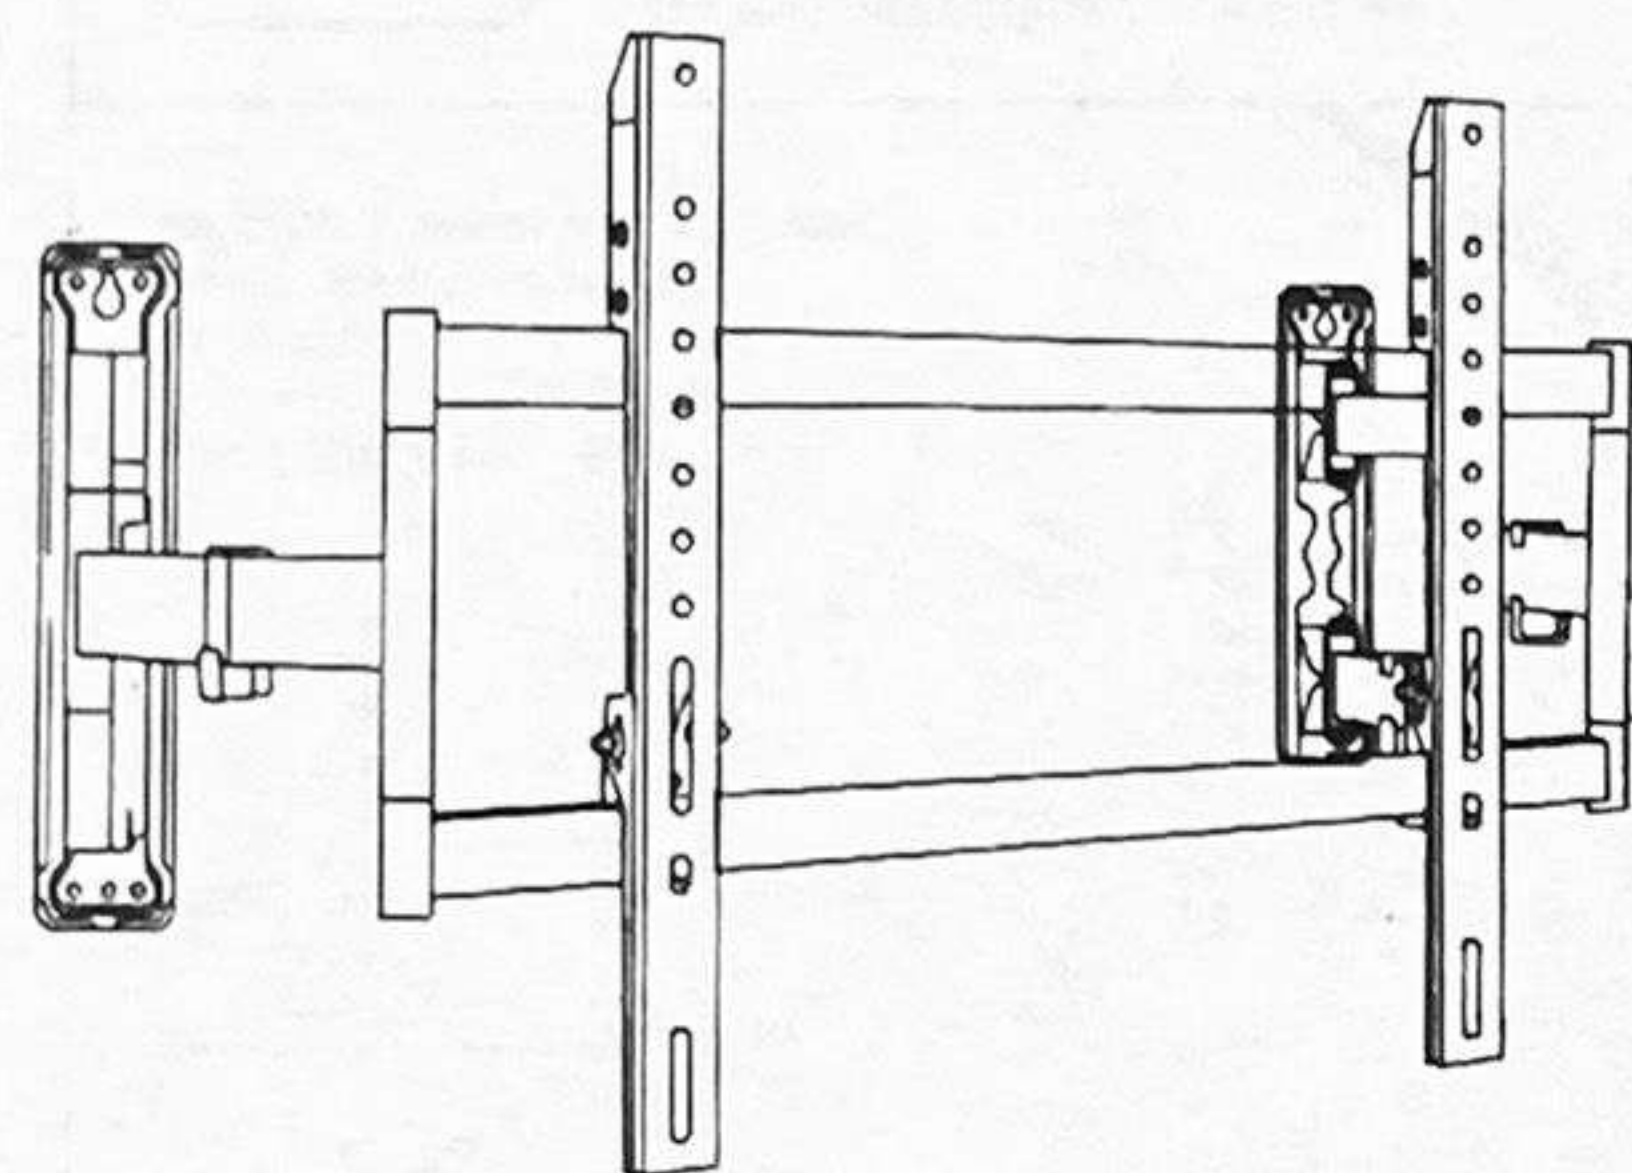


安装说明书 Instruction book



大屏液晶电视 内嵌式悬臂挂架

Model-K100 Full Motion Cantilever
Mount For LED and LCD TVs
Large & Heavy Duty
With Built in Cable Management

Fits: 50"-90"
VESA:200X200/600X600


WARNING! 警告!

Severe personal injury and property damage can result from improper installation or assembly. Read the following warning carefully before beginning.

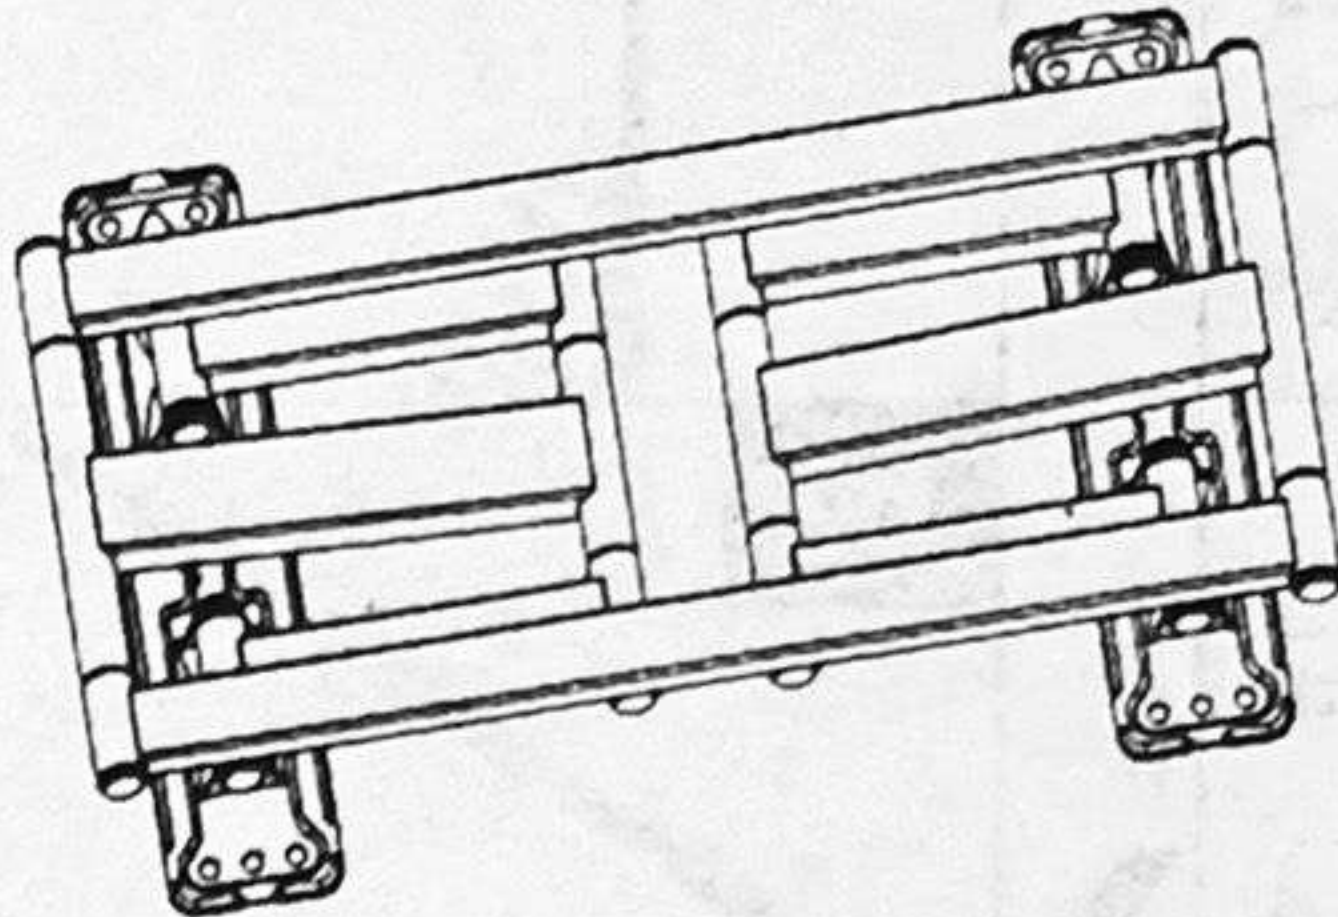



警告! 如果组装或安装不当, 这可能导致人员重伤、死亡或财产损失。请您在组装或安装前, 先仔细阅读说明书及警告信息。

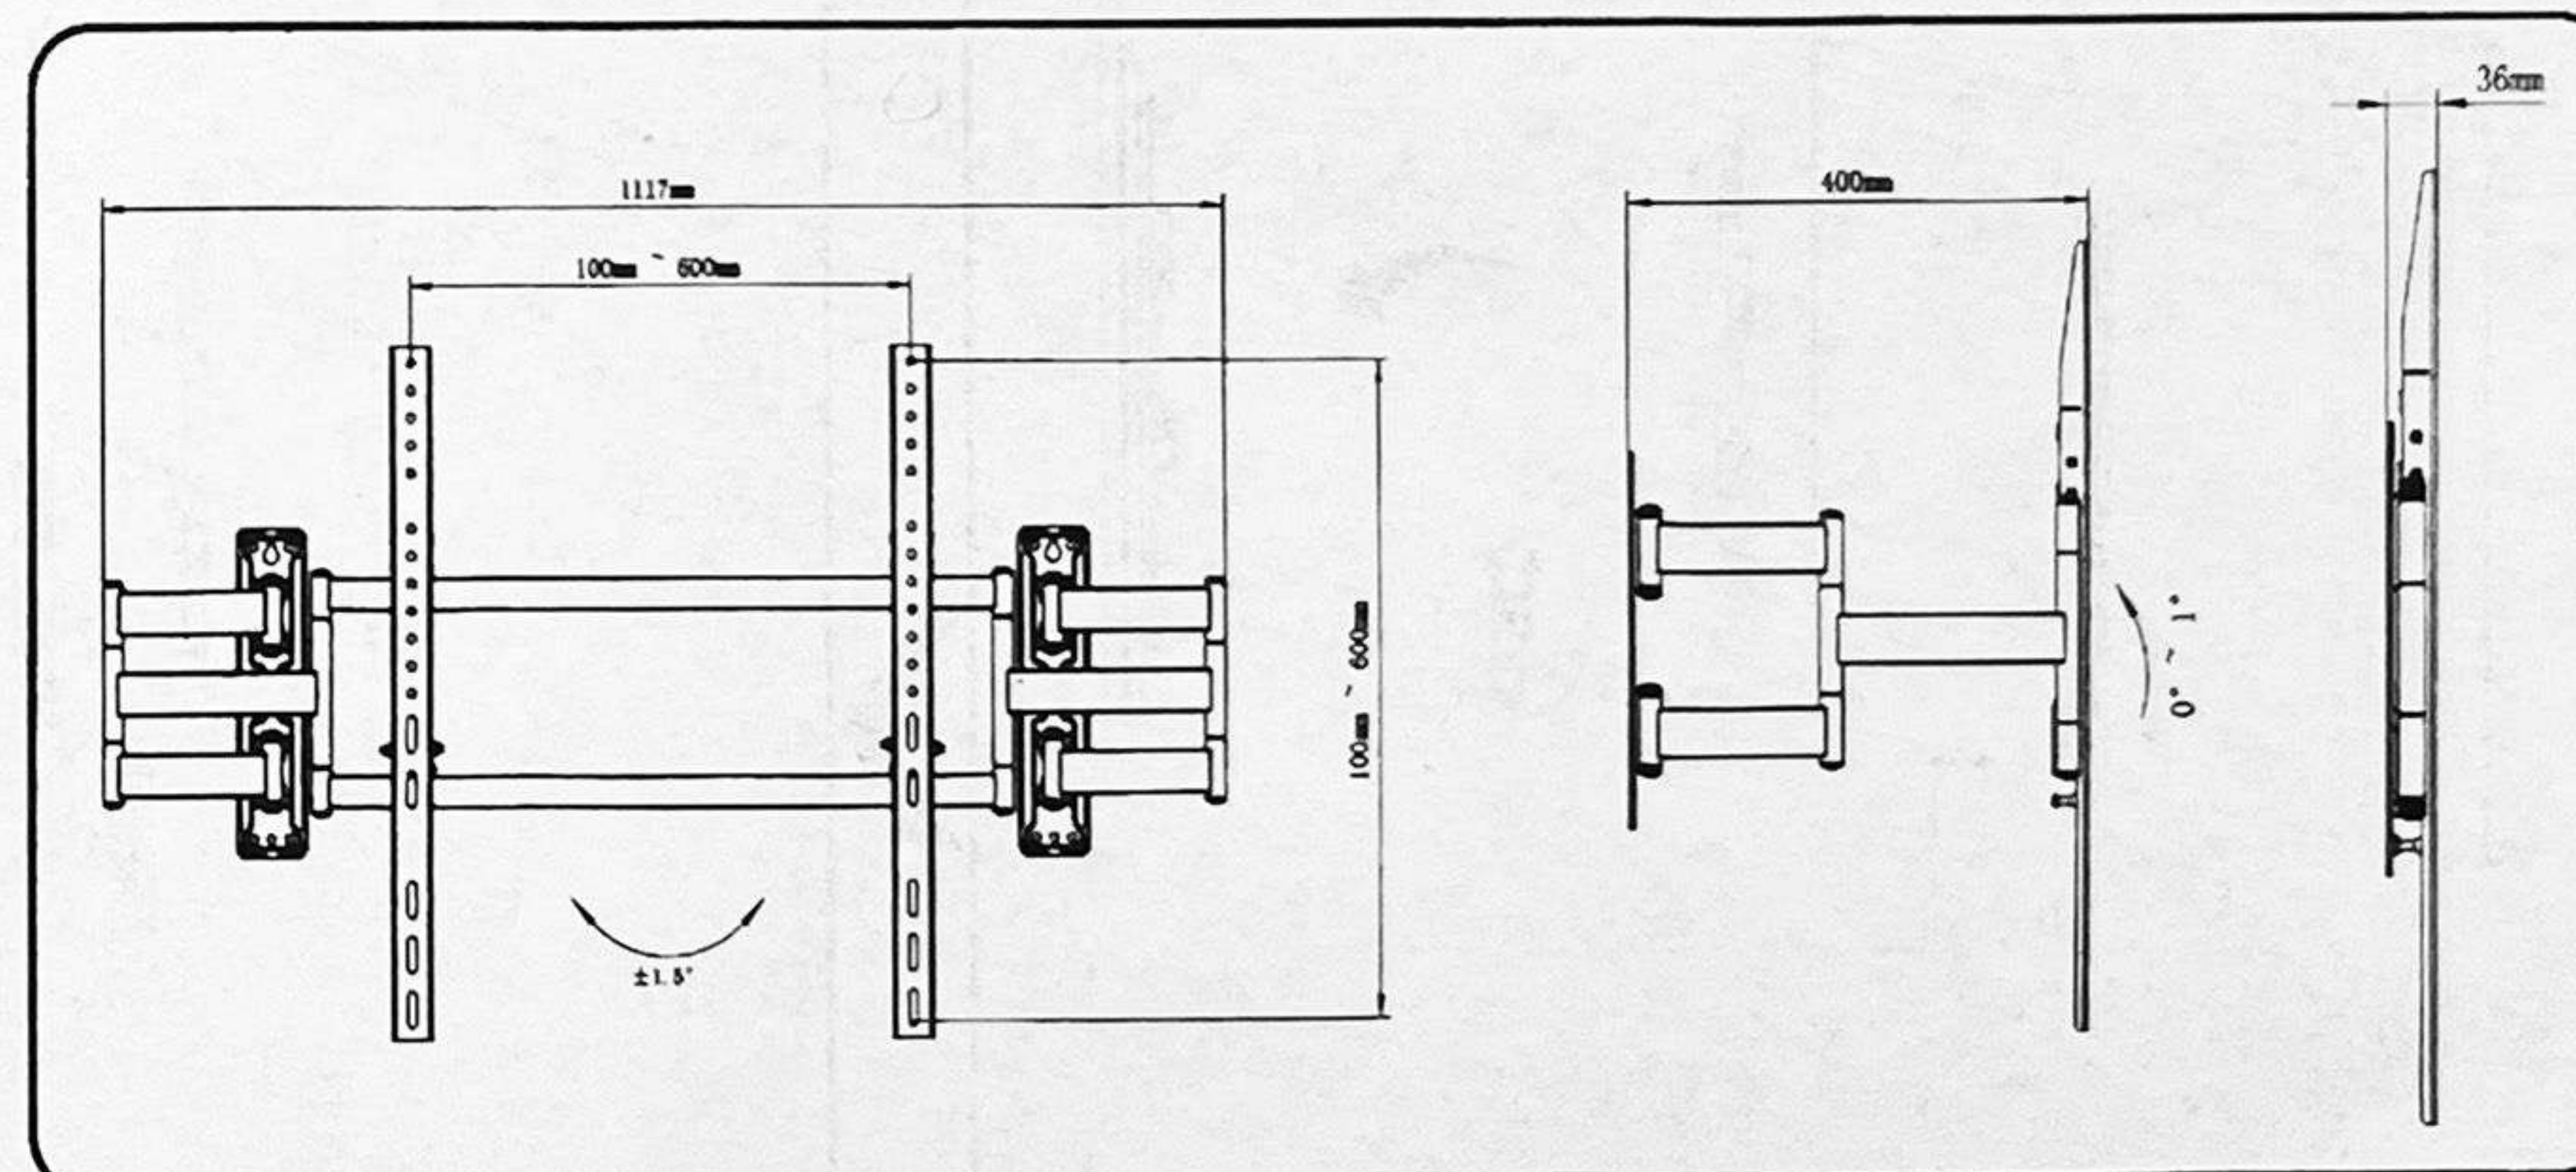
- If you do not understand the instructions or have any concerns or questions, please contact a qualified local installer.
- 如果您不理解说明或者遇到任何疑问或问题, 请与具备资格的当地安装人员联系。
- Do not install or assemble if the product or hardware is damaged or missing, if you require replacement parts, please contact your local distributor for assistance.
- 如果产品或配件受损或缺失, 请不要组装或安装。如果您需要替换零件或其他, 请联系当地的经销商以获取帮助。
- Do not use this product for anything other than the original design.
- 除了产品本身设计的用途外, 请不要将此产品用于其他领域。
- This product contains moving parts, please use with caution.
- 此产品设计包含滑动部件, 为了安全, 请小心使用。
- The manufacturer disclaims any liability for the modifications, improper installation, or installation over the specified weight range. The manufacturer will not be liable for any damages arising out of the use of, or inability to use, the product. All images are for reference, to prevail in product.
- 厂商住此声明, 对于以下情况所造成的损毁或损伤不承担任何法律责任: 对产品自行改造, 或安装不当, 或安装超过此产品所注明的最大承重, 或使用不当而造成此产品磨损或毁坏。图示与实物如有不符现象, 请以实物为准。

Manual 说明

			
Level 水平尺	Metre Rule 米尺	Phillips Screwdriver 螺丝起子	
			
Pencil 铅笔	Wrench 扳手	Socket wrench 套筒扳手	Electric drill 电钻

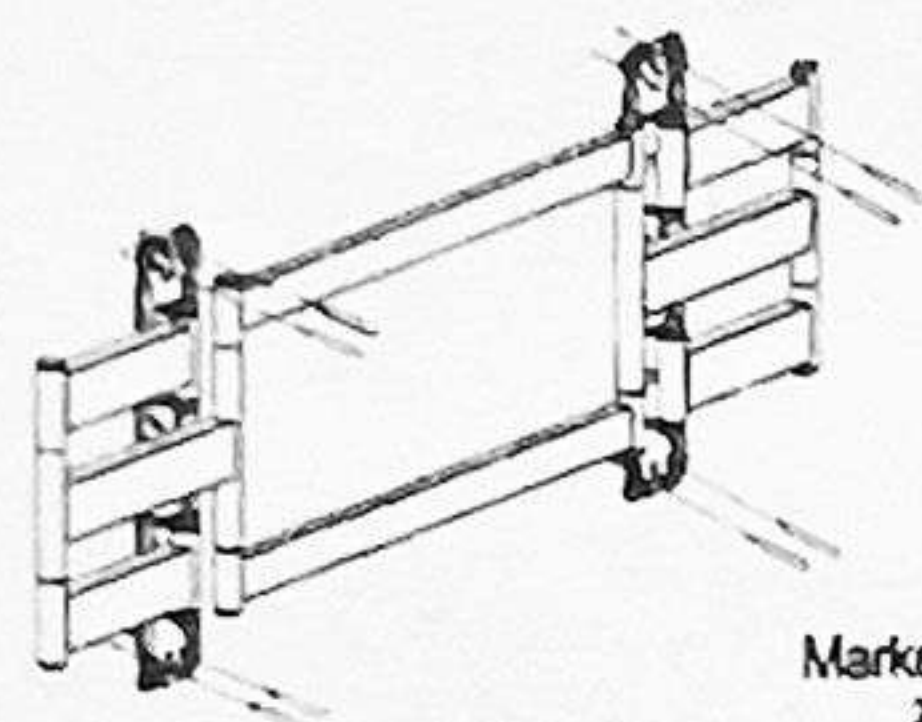
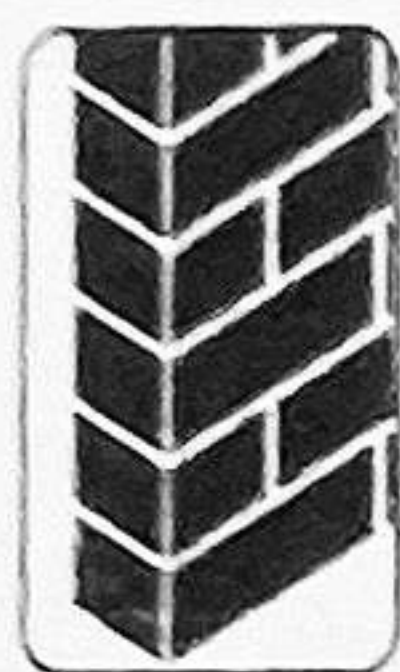
Parts List 物料清单

Parts List 物料清单							
1X 	1X 	1X 	2X 				
 A M6*35mm X4	 B M6*25mm X4	 C M8*25mm X4	 D φ13*6.2*1.5mm X4	 E 15*8.5*12mm X4	 F 开口扳手 X1	 G M10*60mm X8	 H M6.5*65mm X8
 J 内六角扳手 X1	 K M6*25mm X2	 M M6*8mm X2					

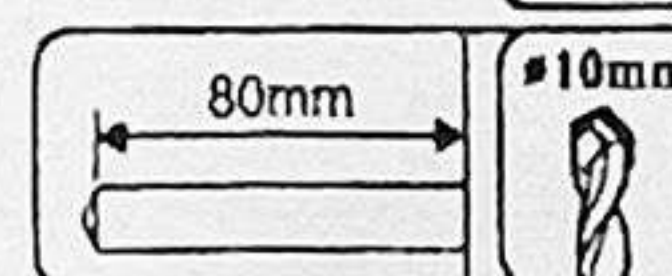
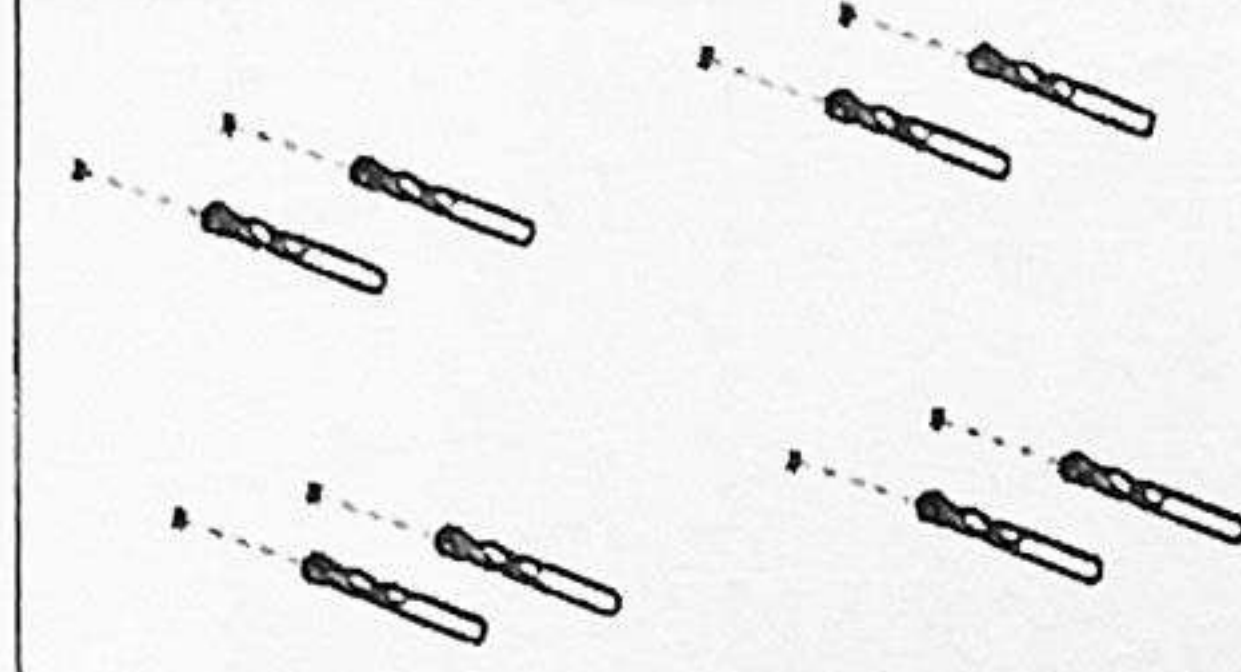


a1

To install a bracket to a wall 支架安装到墙的步骤

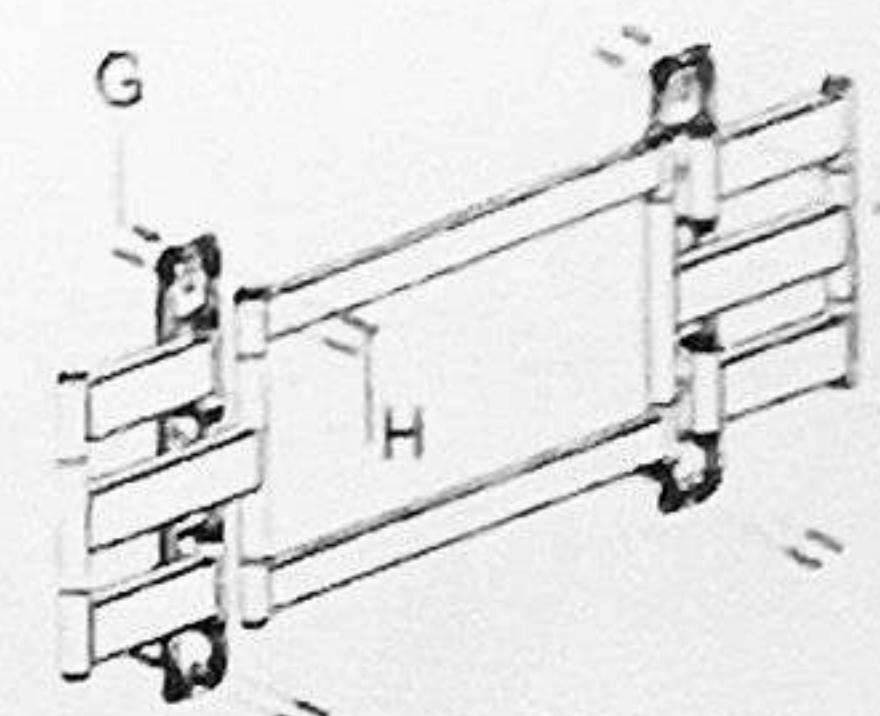
Marked 10 locations on wall
在墙上标记了10个位置

a2

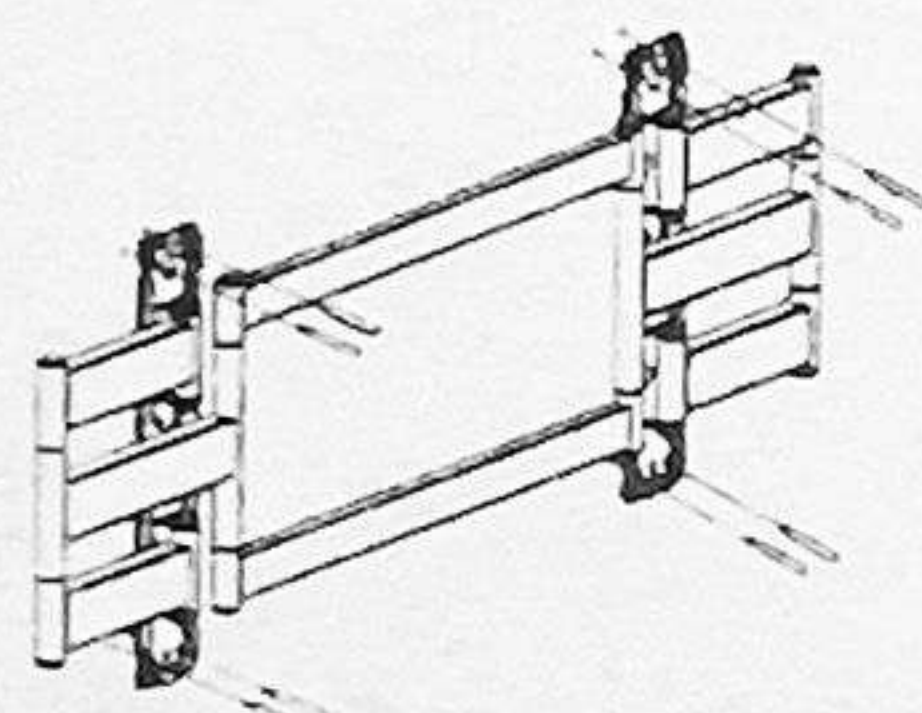
Drill 10 holes at marked positions
在标记位置钻10个孔

a3

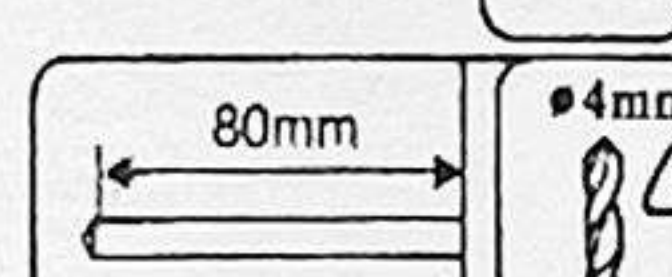
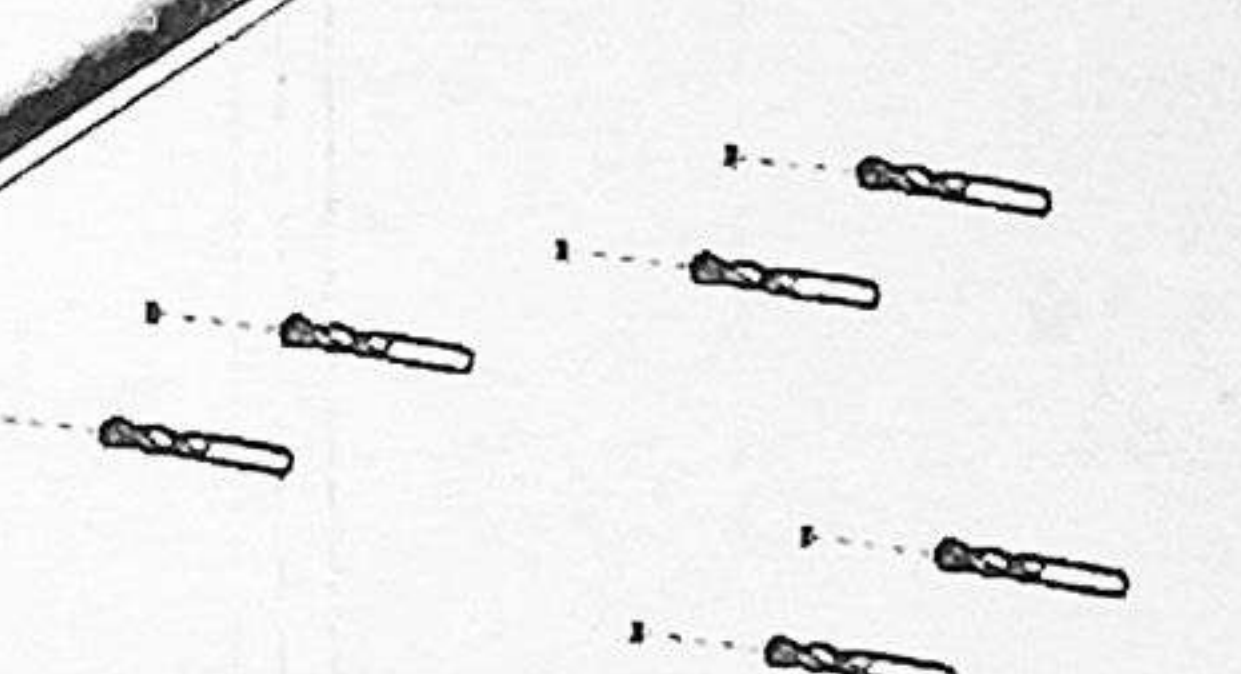
To install a display panel 面板安装显示器的步骤

Installation 10 anchors into drilled holes,
then install 10 hex lag
screws through wall plate mounting
holes and into anchors
将10个锚安装到孔中, 然后通过壁板
安装孔将10个六角拉钉安装到锚中

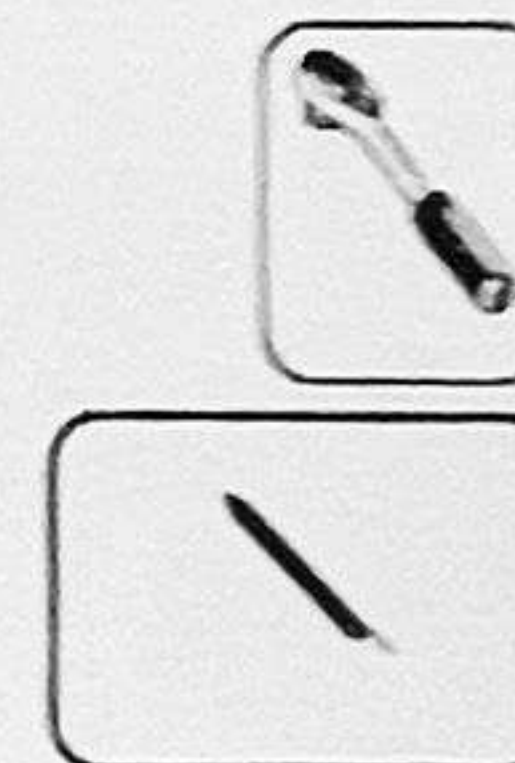
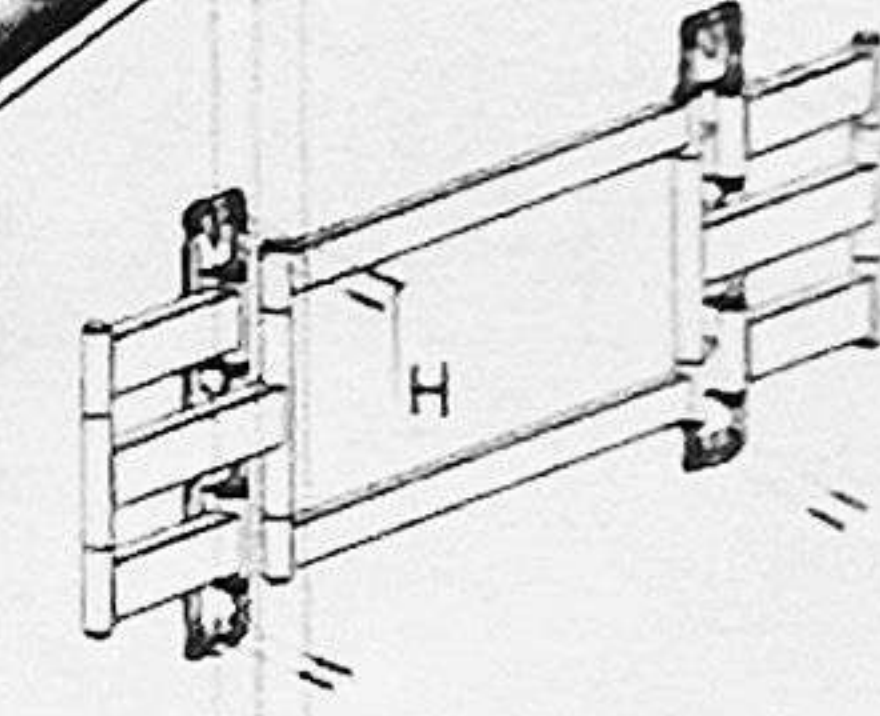
b1

Marked 10 locations on wood studs
在木钉上标记10个位置

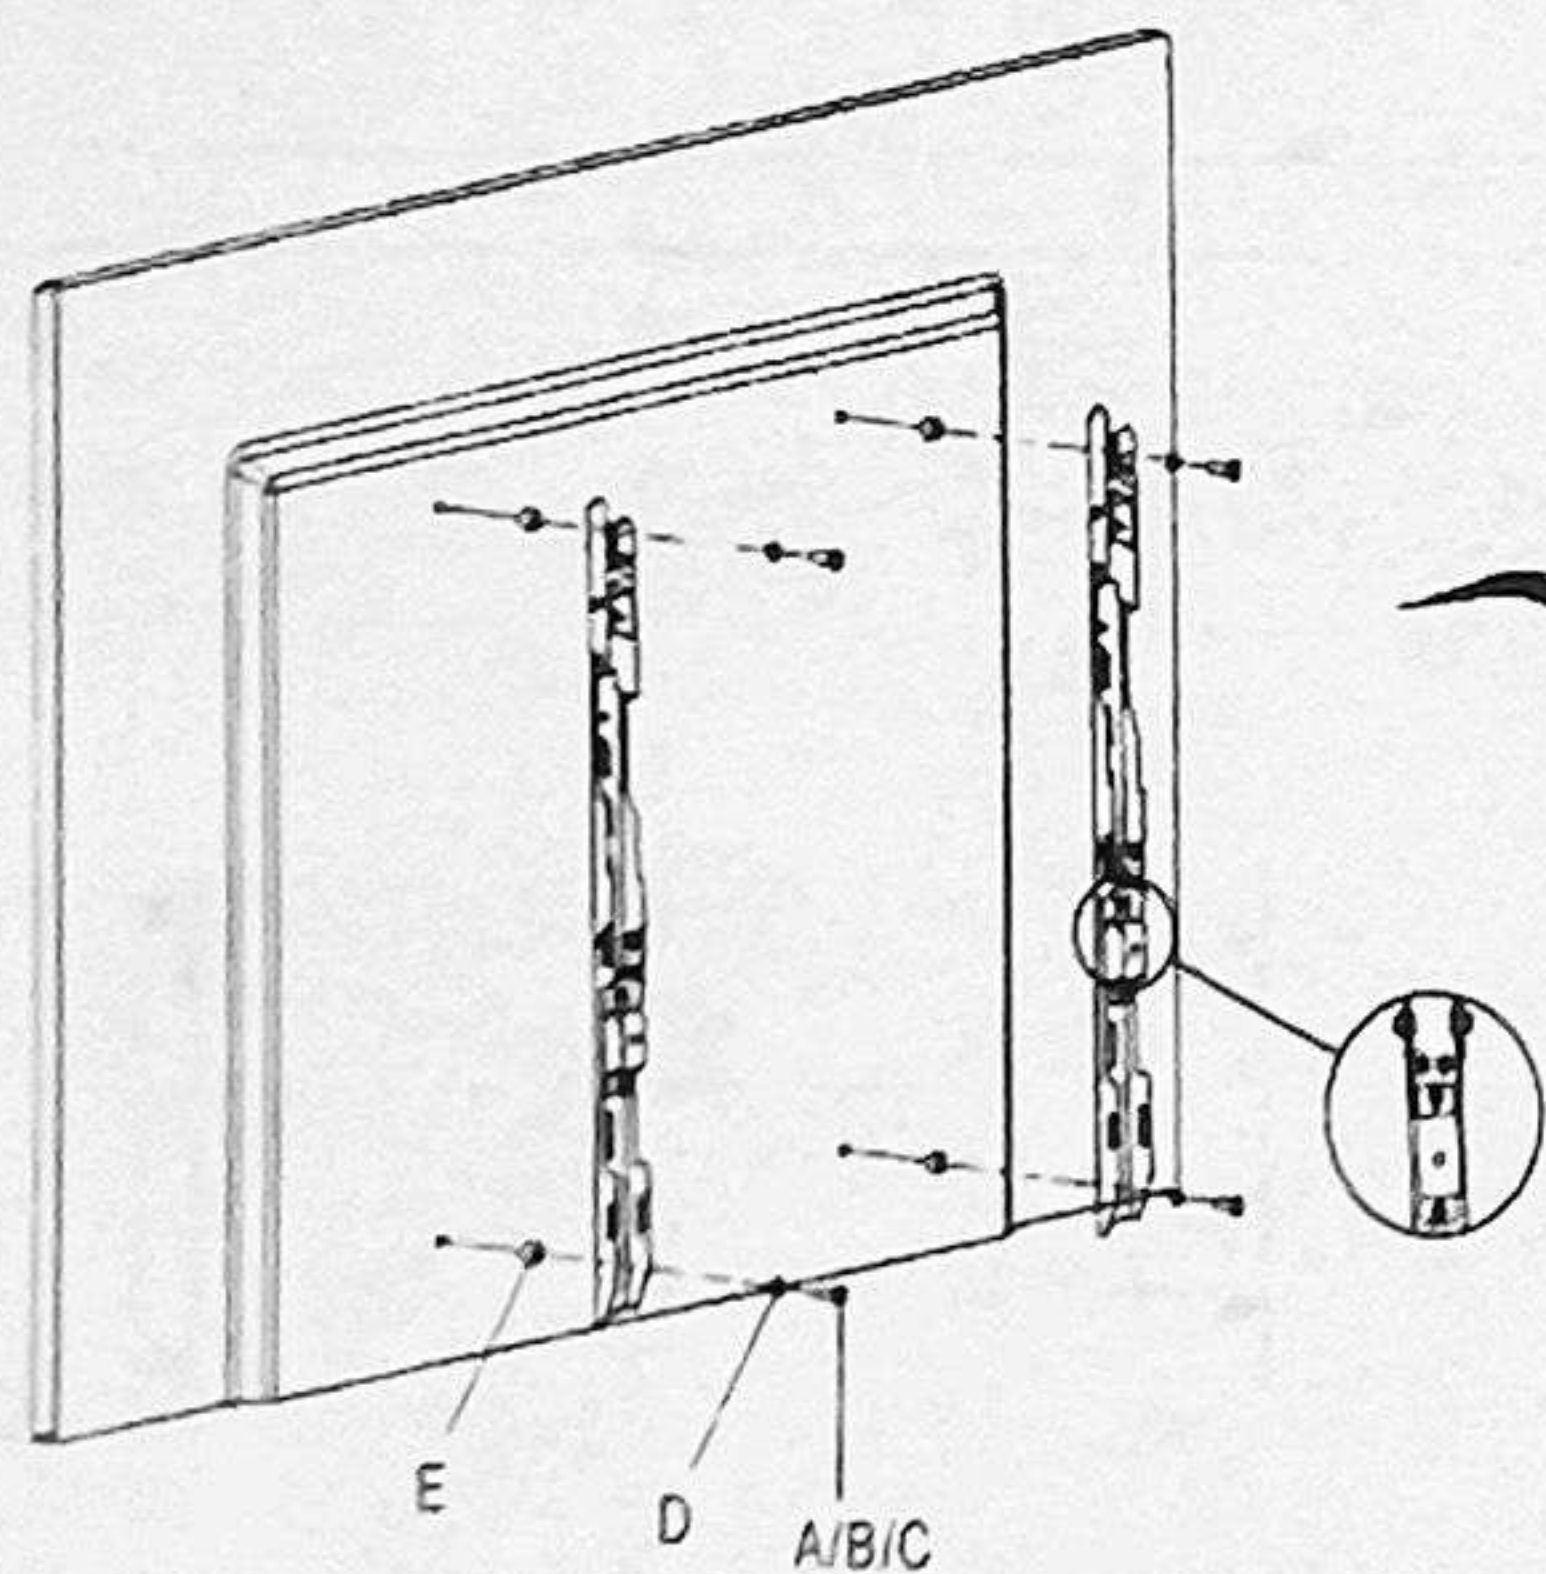
b2

Drill 10 holes at marked positions
在标记位置钻10个孔

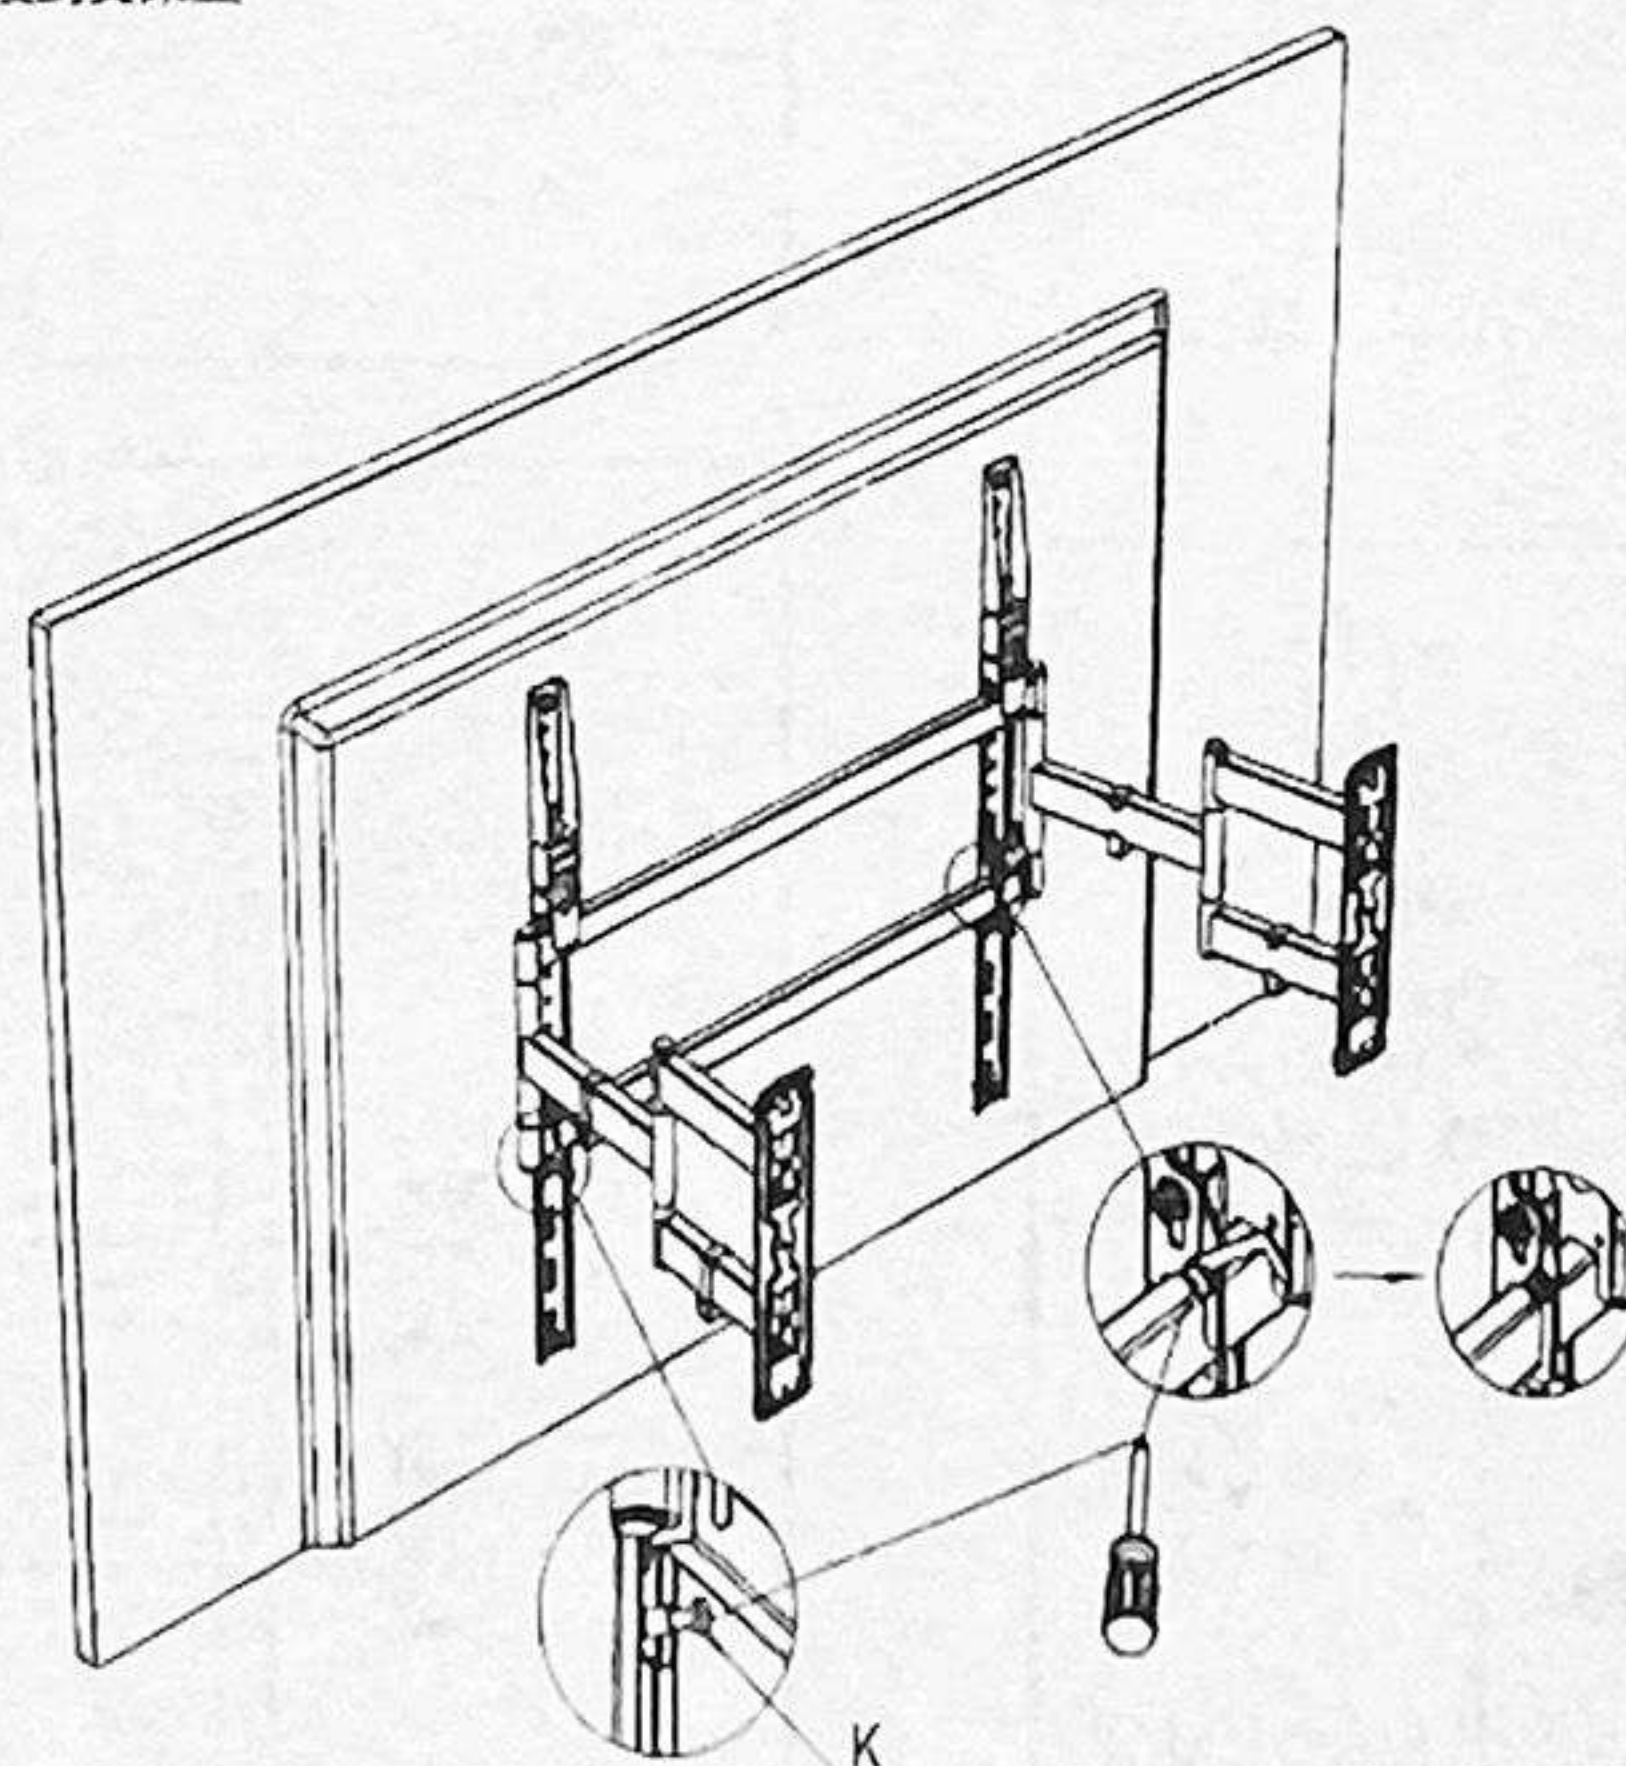
b3

Install 10 hex lag screws through wall
plate mounting holes and into
drilled holes
通过壁板安装孔和钻孔安装
10个六角拉钉

4.

To install the bracket to the monitor
支架安装到显示器的步骤

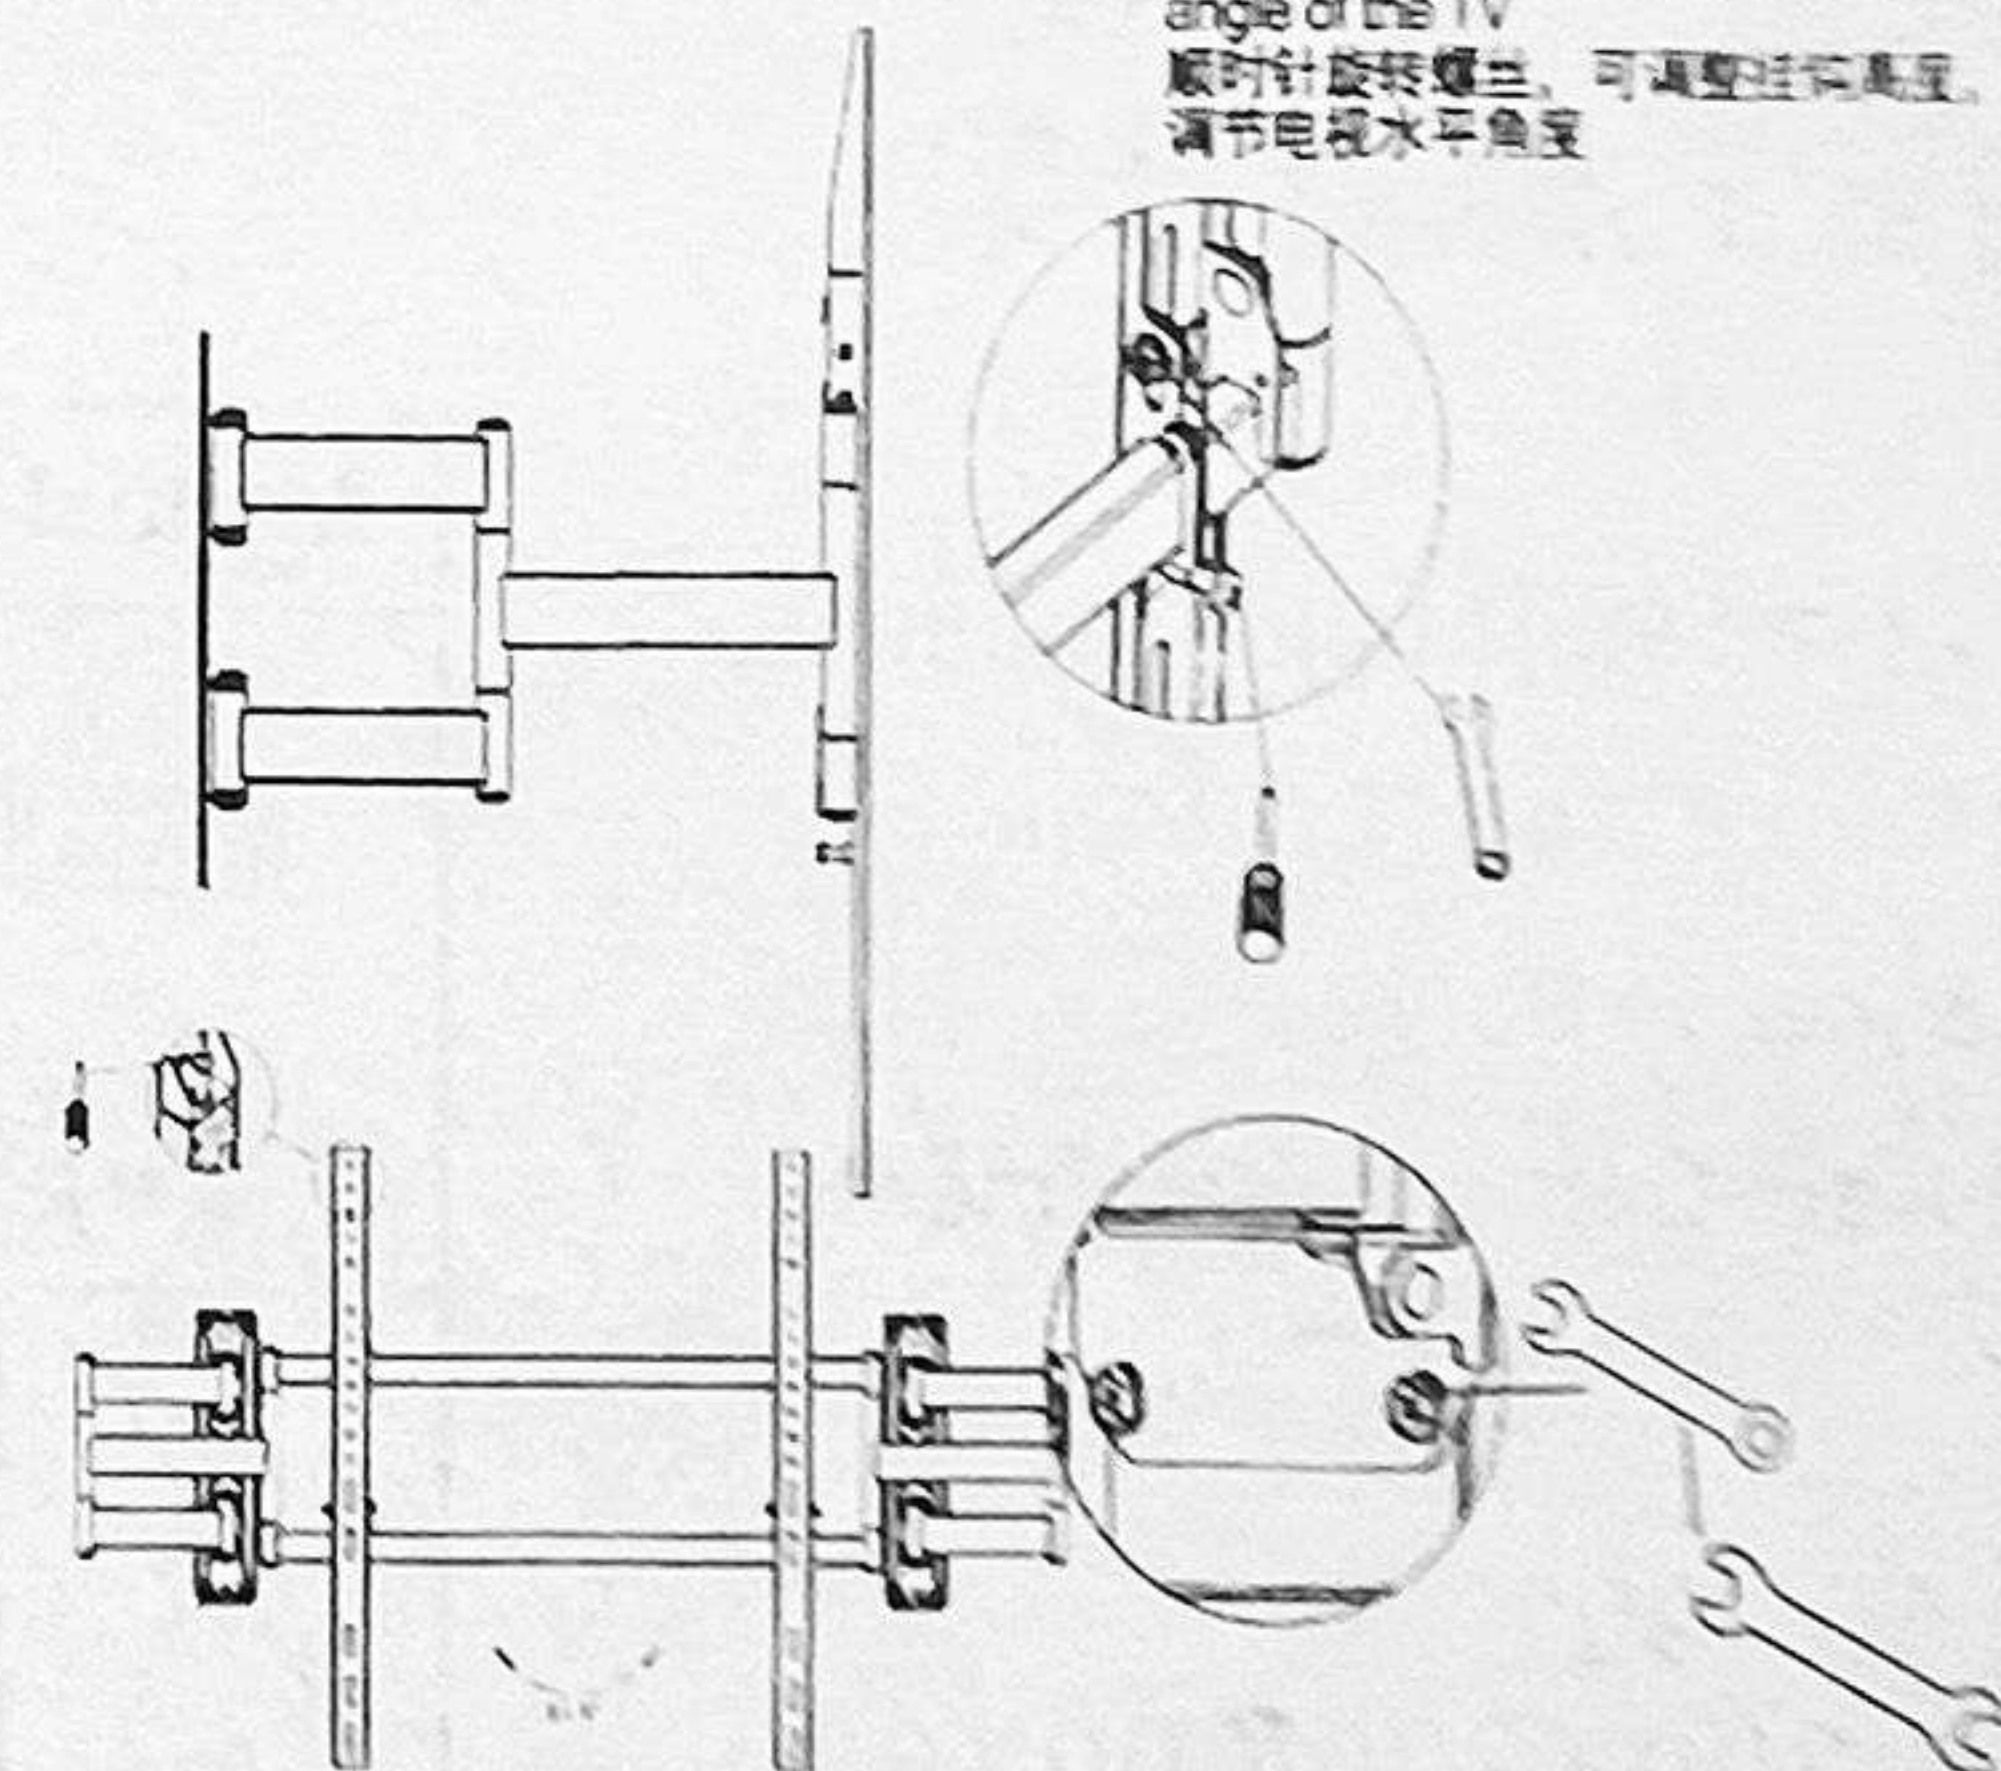
5.

Procedure for mounting and locking the bracket
支架安装锁定的步骤Attach TV to the mount
将电视连接到支架上

6.

Steps for bracket angle adjustment
支架角度调整的步骤Tilt/angles adjustment
倾角调整

0° ~ 1°

Rotate the screw clockwise to adjust the
height of the hook and adjust the horizontal
angle of the TV
顺时针旋转螺丝, 可调整挂钩高度,
调节电视水平角度Rotate the screw clockwise to raise the lower half of the hook, adjust the TV pitch angle,
and then tighten the hex nuts on both sides of the hook to fix the TV position.
顺时针旋转螺丝, 可抬高挂钩下半部分, 调节电视俯仰角度, 然后拧紧挂钩两侧的大螺母, 固定电视位置